

HYFLEX[®] 11-600/11-601 GLOVES

- Light-duty polyurethane coated, knit nylon liner
- Silicone-free
- Snug fit for maximum dexterity and tactile sensitivity New palm dipping technology – keeps back of hands and knuckles open, reducing hand fatigue and promoting comfort and coolness
- Seamless
- Accepted for use in Canadian

Liner

- food processing facilities
- Case Qtv: 144
- Sold per pair

SAW971 **SAW972**

SAW973

Applications: Electronics assembly Ansell and computer assembly

Order No.	Description	Size	Order No.	Description	Size
11-600			11-601		
SAW968	White	6	SAW974	Grey	6
SAW969	Polyurethane	7	SAW975	Polyurethane	7
SAW970	Palm Coated,	8	SAW976	Palm Coated,	8
SAW971	White Nylon	9	SAW977	Black Nylon	9

SAW978

SAW968

Liner

10

HI-TECH ASSEMBLY PALM COATED GLOVES

- Seamless 13-gauge 100% black nylon liner
- Abrasion, tear and small cut resistant
- Open back eliminates perspiration and offers superb user comfort
- Grey polyurethane-coated palm Anatomical shape
- facilitates movement
- Case Qty: 72 Sold per pair

Applications: Car mechanics, handling of greasy parts, industrial assembly, precision mechanics



Order	Mfg.		\rightarrow
No.	No.	Size	
SAO085	BO500B-06	6	
SAO086	BO500B-07	7	SHOWAREST
SAO087	BO500B-08	8	
SAO088	BO500B-09	9	

HYFLEX[®] 11-618 GLOVES

- Black polyurethane palm coated
- · Ultra-light weight glove maximizing touch and precision for delicate handling operations
- 18-gauge glove nylon with soil-hiding polyurethane coating · Ideal for workers who need a higher level of touch
- and precision in dry or slightly oily applications
- Ultralight weight 18-gauge seamless liner enhances flexibility, tactility and handling efficiency
- The ultralight glove is just 0.8-mm thick in total, providing high dexterity with high abrasion resistance (Level 3)
- Silicone-free
- Case Qty: 144
- Sold per pair

Applications: Light assembly requiring high degree of precision, picking and lifting small pieces, finishing works

Order No.	Size
NO.	3126
SEI717	Small
SEI718	Medium
SEI719	Large
SEI720	X-Large

ZEN(TH

BREATHABLE LIGHTWEIGHT NITRILE FOAM PALM COATED GLOVES

- Lightweight nitrile foam offers maximum breathability and tactile sensitivity
- 13-gauge seamless nylon shell provides a cool comfortable fit
- Superior dexterity, comfort and wet grip reduces hand fatigue
- · Resists abrasion, cuts and punctures
- Knit wrists prevents debris from entering the glove
- Case Qty: 120
- · Sold per pair

Applications: Metal stamping, material handling, automotive assembly and small oily parts handling

10

11





Ansell

200

SAQ349

HYFLEX® 11-800/11-801 GLOVES

- · Light-duty foam nitrile coated
- Knit nvlon liner
- · Excellent grip in light oil applications, oil is channelled away from the glove surface
- Highest level of comfort and protection Resistant to snags and abrasions
- Accepted for use in Canadian
- food processing facilities
- Case Oty: 144
- · Sold per pair

Applications: Automotive

assembly, handling small parts (especially where oil is present)



Order No.	Description	Size	Order No.	Description	Size
11-800	••••		11-801	•	
SAW921	Grey Foam	6	SAW962	Grey	6
SAW922	Nitrile Palm	7	SAW963	Polyurethane	7
SAW923	Coated, White	8	SAW964	Palm Coated,	8
SAW924	Nylon Liner	9	SAW965	Black Nylon	9
SAW925		10	SAW966	Liner	10
SAW926		11	SAW967		11

LIGHTWEIGHT NITRILE FOAM PALM COATED GLOVES

- Lightweight nitrile foam palm coating
- 13-gauge seamless knitted nylon shell
- Superior dexterity, comfort and wet grip reduces hand fatigue Resists abrasion, cuts and punctures
- Knit wrist
- Palm coating provides a cool comfortable fit Case Qty: 120
- Sold per pair

Applications: Metal stamping, material handling, automotive assembly and small oily parts handling

Order	
No.	Size
SAM629	6
SAM630	7
SAM631	8
SAM632	9
SAM633	10
SAM634	11



POLYESTER SHELL LIGHTWEIGHT NITRILE FOAM PALM COATED GLOVES

- Lightweight nitrile foam palm coating
- 13-gauge seamless polyester shell provides a comfortable fit
- · Superior dexterity, comfort and wet grip reduces hand fatigue
- Resists abrasion, cuts and punctures
- · Knit wrists prevents debris from entering the glove
- Case Oty: 120 Sold per pair

Applications: Metal stamping, material handling, automotive assembly and small oily parts handling

Order		ZENTH
No.	Size	
SBA605	6	
SBA606	7	
SBA607	8	
SBA608	9	
SBA609	10	Safety Products
SBA610	11	

G40 NITRILE COATED GLOVES

Better oil and industrial grease grip than the previous G40 nitrile glove

- Silicone-free, nitrile foam coated Washable – maintains the EN388 ratings through at least five wash cycles
- Ecofriendly packaging no separate insert, no printed bags, less waste
- EN 388 rating of 4131
- EN 420 dexterity level 5
- · Color coded hem for sizing
- Case Qtv: 60
- Sold per pair

Applications: Metal, glass and wood handling, automotive and aerospace assembly

Order No.	Mfg. No.	Size
SAQ347	40225	Small
SAQ348	40226	Medium
SAQ349	40227	Large
SAQ350	40228	X-Large
SAQ351	40229	2X-Large

BLACK LIGHTWEIGHT NITRILE FOAM PALM COATED GLOVES

- · Lightweight nitrile foam palm coating
- 13-gauge seamless polyester shell provides a cool comfortable fit
- Superior dexterity, comfort and wet grip reduces hand fatigue
- · Resists abrasion, cuts and punctures
- Knit wrists
- Case Qty: 120
- Sold per pair

Applications: Metal stamping, material handling, automotive assembly and small oily parts handling

ZENUTH

Order		
No.	Size	
	OILC	
SBA837	6	
SAX783	7	
SAX784	8	
SAX785	9	
SAX786	10	
SAQ179	11	

SHOWA 377 GLOVES

- Thin dipped blue nitrile coated glove
- Black foam nitrile coated palm ensures excellent grip
- · Elastic knit-wrist holds the glove firmly on the arm for enhanced fit
- Liquid resistant
- Launderable
- Case Qty: 72
- Sold per pair

Applications: Mechanical and automotive, constructions, machine assembly, handling oily objects, limited chemical splash and refineries

Order	Mfg.	
No.	No.	Size
SEI864	377-06	Small
SEI865	377-07	Medium
SEI866	377-08	Large
SEI867	377-09	X-Large
SEI868	377-10	2X-Large







ZORB-IT[™] SPONGE NITRILE PALM COATED GLOVES

- Zorb-IT[™]'s unique, patent-pending "sponge nitrile" technology is changing the rules of what a flat-dip nitrile glove can be
- The sponge nitrile produces an extra-absorbent nitrile dip that conforms and adheres to the nylon shell like no other glove
- Beats the competition in laundering nearly three-to-one, and absorbs almost twice as much oil and grease while still delivering a sure grip
- Stands up to repeated washing with no shrinkage Accepted for use in Canadian
- food processing facilities
- Made of FDA compliant materials
- Case Qty: 72
- Sold per pair

Order No.	Nitg.	Size	and the second
	NO.	5120	THE REAL PROPERTY
SAK964	4550-06	X-Small	C Genter Color
SAK965	4550-07	Small	
SAK966	4550-08	Medium	1
SAK967	4550-09	Large	
SAK968	4550-10	X-Large	300

SHOWABEST

HYFLEX® 11-900 GLOVES

- Light-duty nitrile coated, knit nylon liner
- Excellent dry grip for applications involving small to medium sized parts
- Abrasion resistance
- Oil repellency, nitrile coating prevents oil from penetrating through the glove, protecting hands from dermatitis
- Accepted for use in Canadian food processing facilities
- Case Qtv: 144
- Sold per pair

Applications: Automotive assembly and metal fabrication

Order

No.	Size
SAW979	6
SAW980	7
SAW981	8
SAW982	9
SAW983	10

PREMIUM NITRILE PALM **COATED GLOVES**

- Seamless nylon knit provides ultimate dexterity and reduces hand fatigue
- Superior abrasion, cut and puncture resistance Fluorescent green shell and green coating
- offers maximum visibility
- Premium comfort and breathability
- Excellent dry grip
- Durable nitrile coated palm
- Knit wrist prevents dirt and debris from entering the glove
- Case Qty: 144

202

· Sold per pair

Applications: Manufacturing, maintenance, small parts handling, laboratory, painting and janitorial

Order		
No.	Size	
SEI851	7	
SEI852	8	
SEI853	9	
SEI854	10	
SEI855	11	

HYFLEX[®] 11-920 GLOVES

- · Nitrile coated palm
- Special nylon fine gauge liner
- Ansell Grip Technology[™] coating repels oils and other lubricants away from the surface via microscopic channels
- Increases surface contact for enhanced grip and control
- Prevents oil penetration and reduces the risk of dermatitis and liquid exposure
- Provides softness, comfort and breathability to the glove
- Ergonomic, natural fit
- Available in a wide range of sizes to protect more workers
- Accepted for use in Canadian food processing facilities
- Case Oty: 144
- Sold per pair

Applications:

Engine and transmission assembly, handling machine parts free, from shavings and sharp edges, handling small castings, gears and other abrasive edged parts, light metal fabrication and parts handling, light stamping in oily environments, product inspection

Order	
No.	Size
SAY772	6
SAY773	7
SAY774	8
SAY775	9
SAY776	10
SAY777	11

NITRI-FLEX LITE® NITRILE PALM COATED GLOVES

- · Seamless nylon knit gloves with a textured green nitrile palm coat
- Snug fitting knit wrist glove is extremely flexible
- · Resist cuts, snags and
- abrasion with non slip grip Accepted for use in Canadian food processing facilities
- Case Qty: 72
- Sold per pair

Ansell

ZENOTH

Applications: Construction, general maintenance, shipping and receiving

Size

Small

Medium

Large

X-Large

 Order No.	Mfg. No.
SQ136	4500S-7
SQ137	4500M-8
SQ138	4500L-9
SQ139	4500XL-10





LIGHTWEIGHT NITRILE COATED GLOVES

- Seamless nylon knit provides ultimate dexterity and reduces hand fatigue
- Premium comfort and breathability
- Excellent dry grip
- Superior abrasion cut and puncture resistance
- Durable nitrile palm coated
- Knit wrist eliminates dirt and debris from entering the glove
- Case Oty: 120 Sold per pair

Applications: Metal stamping, material handling, automotive assembly and small parts handling

		- inth
Order		ZEN
No.	Size	
SAO157	7	
SAO158	8	
SAO159	9	-
SAO160	10	
SAP355	11	

BLACK NYLON NITRILE PALM COATED GLOVES

- · Seamless black nylon knit provides ultimate dexterity and reduces hand fatigue
- · Superior abrasion, cut and puncture resistance
- Premium comfort and breathability
- Excellent dry grip
- Durable nitrile coated palm
- Knit wrist
- Case Qty: 120
- Sold per pair

Order	
No.	Size
SAP931	7
SAP932	8
SAP933	9
SAP934	10
SAP935	11

HYLITE® 47-400 GLOVES

- Nitrile coated, interlock knit lined, medium-duty
- Outwear cotton up to 12 to 1, light leather
- 5 to 1 and PVC coated gloves 3 to 1
- Exceptional snag, puncture, abrasion and cut resistance
- Extra comfort
- Accepted for use in Canadian food processing facilities
- Case Otv: 144

 Sold per participation 			IMUT
Order No.	Size		(5 Arm
SAW984	7		
SAW985	8		
SAW986	8.5	A	
SAW987	9	Ansell	
SAW988	10	THISCH	

MEDIUMWEIGHT NITRILE COATED GLOVES

- Interlock cotton lining
- Excellent comfort and breathability
- Superior abrasion cut and punctures resistance
- Greater dexterity than heavyweight Knit wrist eliminates dirt and
- debris from entering the glove Open back coating provides
- a cool comfortable fit
- Case Qty: 120
- · Sold per pair

Applications: Light to medium fabrication, material handling, automotive, and general maintenance

Order No.	Size
SAO150	7
SAO151	8
SAO152	9
SAO153	10
SAO154	11

MEDIUMWEIGHT NITRILE **COATED GLOVES**

- 13-gauge seamless knitted cotton shell
- Excellent dexterity and dry grip
- · Resists abrasion, cuts and punctures · Knit wrist prevents debris
- from entering the glove
- Open back 3/4 coating provides a cool comfortable fit
- Case Qty: 120
- Sold per pair

Applications: Metal stamping, material handling, automotive, small parts handling and general maintenance

Order No.	Size
SAM646	7
SAM647	8
SAM648	9
SAM649	10

PVC PALM COATED GLOVES

- String knit design for excellent breathability and comfort
- PVC palm coating provides superior abrasion resistance, grip and durability
- Knit wrist eliminates dirt and debris from entering the glove
- Black on white
- Case Oty: 240
- Sold per pair

Applications: Parts handling, assembly and metal stamping

Order	
No.	Size
SAP211	Small
SAP212	Medium
SAP213	Large
SAP214	X-Large





ZENTH







rendin

ZENTH

HI-VIZ NATURAL RUBBER LATEX PALM-COATED ACRYLIC-LINED GLOVES

- 100% acrylic thermal liner offers superior cold protection
- 7-gauge seamless terry knitted and brushed lining
- Resists abrasions, cuts and punctures
- Natural rubber latex palm coating
 Uncoated back permits breathability and limits perspiration
- Crinkle finish coating provides
- superior wet and dry grip
- Case Oty: 60
- Sold per pair

Applications: Fishing industry, cold/outdoor environments, glass/wood handling, and general maintenance.

Order		
No.	Size	
SEC797	7	•
SEC798	8	
SEC799	9	
SEC800	10	Safety Products
SEC801	11	

POWERFLEX® 80-100 GLOVES

- Natural rubber latex, crinkle finish
- Soft seamless poly/cotton knit liner
- Superior wet and dry grip
- Combination of cut, abrasion
 and puncture resistance
- Uncoated back allows air to circulate which keeps hands cooler and drier
- Accepted for use in Canadian food processing facilities
- Meets ANSI/ISEA 105 Level 1,
- EN388 Level 2 for cut resistance
- Case Oty: 144
- Sold per pair

Applications: General maintenance, shipping and receiving, assembly, concrete and brick handling

Order	
No.	Size
SAY841	6
SAY842	7
SAY843	8
SAY844	9
SAY845	10

POWERFLEX[®] T[°] HI-VIZ YELLOW™ 80-400

- Natural rubber latex-coated acrylic thermal liner
- Excellent insulation for cold environment
- Strong combination of abrasion, liquid repellency and dry grip
- Uncoated back allows for air circulation to keep hands drier
- Palm-coated crinkle finish
- Accepted for use in Canadian
- food processing facilities
- Case Oty: 72 Sold per pair

Applications: Fishing industry, cold storage, winter transportation, unheated warehouses, yard and field work, freight handling.

Order		_
No.	Size	
SEA278	7	
SEA279	8	
SEA280	9	
SEA281	10	
SEA282	11	

NATURAL RUBBER LATEX PALM COATED FLEECE LINED GLOVES

- 10-gauge seamless knitted poly/cotton shell
- Superior wet and dry grip
- Warm fleece lining
- Resists abrasion, cuts and punctures
- Knit wrist prevents debris
- from entering the glovePalm coating provides a cool comfortable fit
- Case Oty: 120
- Sold per pair

Applications: Glass handling, construction, wood handling and general maintenance



ZENTH

Order	
No.	Size
SAN431	8
SAN432	9
SAN433	10
SAN434	11

NATURAL RUBBER LATEX COATED GLOVES

- 10-gauge seamless knitted poly/cotton shell
- Textured coating provides superior wet and dry grip
- Resists abrasion, cuts and punctures
- Knit wrist prevents debris from entering the glove
- Palm coating provides a cool comfortable fit
- Case Oty: 120
- Sold per pair

Applications: Glass handling, construction, wood handling, and general maintenance

Order No.	Size	
SEB865	7	
SAL255	8	•
SAL256	9	
SAL257	10	
SAL258	11	Salety Produc

ATLAS THERMA FIT® 451 COATED GLOVES

- Crinkle finish natural rubber palm coating
- Warm fleece lined shell with a knit wrist
- Exceptional warmth as well as a snug fit for excellent dexterity
- Improved grip for wet and dry conditions
- Case Qty: 72
- Sold per pair

Applications: Sheet metal, metal stamping as well as glass manufacturers and glaziers, agricultural and general assembly applications

Order No.	Mfg. No.	Size
SAJ985	451-07	Small
SAJ986	451-08	Medium
SAJ987	451-09	Large
SAJ988	451-10	X-Large







<u>Ansell</u>

ATLAS FIT[®] 300 COATED GLOVES

- Durable rubber coating
- Cotton/polyester lining provides extremely comfortable fit
- Rough textured aripping
- · An elastic knit-wrist secures the glove above the wrist for comfort and prevents debris from entering the glove
- Launderable
- Case Qty: 144
- Sold per pair



Applications: Construction, landscaping, carpentry, floor tiling, maintenance, masonry, garbage collection, highway work, roofing, shipping and receiving

Order No.	Mfg. No.	Size	Order No.	Mfg. No.	Size
BLUE			GREEN		
SAO815	300-S	Small	SAO819	310-XS	X-Small
SAO816	300-M	Medium	SAO820	310-S	Small
SAO817	300-L	Large	SAI304	310-M	Medium
SAO818	300-XL	X-Large	SAI305	310-L	Large
			SA0823	310-XL	X-Large

NITTY GRITTY® RUBBER PALM COATED GLOVES

- The original Nitty Gritty® was the industry's first wrinkle-finished, natural rubber-coated glove
- · Offers the best in grip and protection
- · Smooth finish glazers' are a standard in the glass industry SC458 · Five piece flannel lined,
- Sanitized[®] recvclable
- Wrinkle palm coated
- Case Qtv: 72
- Sold per pair

SC459 Applications: Rugged jobs, handling sharp edged objects, glass, sheet metal

Order No.	Mfg. No.	Description
SC458	63PNFW	Knit Wrist, Men's
SAJ468	L63PNFW	Knit Wrist, Ladies
SC459	66NFW	Safety Cuff
SAJ984	65NFW	12" Gauntlet

HYD-TUF® 52-547 GLOVES Ansell

- · Medium to heavy-duty nitrile coated
- Outperform standard cotton and leather gloves
- Driver's style, with cloth back and soft jersey lining
- Nitrile coating resists snags, punctures, abrasions and cuts
- · Excellent dry grip and repelling oil, grease and grime
- Snug and comfortable fit
- Nitrile knuckle strap provides added protection across the back of the hand Safety cuff
- · Accepted for use in Canadian
- food processing facilities
- Case Oty: 144 Sold per pair

Applications: Handling cores and castings, operating machinery and equipment, shipping and receiving and maintenance

Order	
No.	Size
SAW956	9
SAW957	10

NATURAL RUBBER LATEX PALM COATED CRINKLE FINISH GLOVES

- High density 100% cotton jersey lining
- · Crinkle finish coating provides superior grip
- Exceptional cut and abrasion resistance
- Safety cuff provides added protection Superior comfort and flexibility
- Case Qty: 120
- Sold per pair

Applications: Glass handling, sheet metal handling and general handling of any sharp-edged materials

Order No.	Size
SAN435	10

HEAVYWEIGHT NITRILE IMPREGNATED GLOVES

- Soft cotton jersey lining
- Exceptional abrasion cut and puncture-resistance
- Safety cuff provides added protection
- · Excellent dry grip resists oil and grease
- Outperforms leather work gloves
- Case Qty: 120
- Sold per pair

Applications: Rough industrial applications, sheet metal handling, fabrication workshops and automotive

Order No.	Size
SAM643	9
SAM644	10
SAM645	11

ORIGINAL NITRI-FLEX® NITRILE COATED GLOVES

- Nitrile-coated for maximum wear and excellent cut, puncture and abrasion resistance
- Economical alternative to cotton and lightweight leather gloves
- Two-piece, 100% cotton liner for comfort, flexibility and dexterity
- Nitri-Flex[®] is launderable for added value Textured grip for safety
- and ease of handling
- Colour-coded knit-wrist indicating size Made of FDA compliant materials
- Case Qty: 72 · Sold per pair

HYD TH

Applications: Assembly, shipping and receiving, general maintenance, light fabrication

0	, 0		
Order No.	Mfg. No.	Size	
PALM CO	OATED, KNIT WR	IST	
SC445	4000P-8	8	
SC446	4000P-9	9	The second se
SE214	4000P-10	10	
FULLY C	OATED, KNIT WR	IST	
SC448	4000-8	8	SC448
SC449	4000-9	9	Com-
SE215	4000-10	10	-



ZENTH

ZENOTH





7FN

SC445



NITRILE LAMINATED GLOVES

- Slip-on style, laminated nitrile
- Nitrile coating makes for a durable glove
- Economical hand protection for a wide variety of jobs where dexterity, grip and snag resistance are required
- Perforated back style to
- keep hands coolCase Qty: 120
- Sold per pair

ZENTH

SAJ647

ZENJTH

Order		
No.	Size	SAJE
FULLY LAMINATED		
SAJ640	7	
SAJ641	8	
SAJ642	9	
SAJ643	10	
PERFORATED BACK		_
SAJ644	7	_
SAJ645	8	
SAJ646	9	
SAJ647	10	

HEAVYWEIGHT NITRILE COATED SAFETY CUFF GLOVES SAN447

- High density 100% cotton jersey lining
- Exceptional durability, grip and flexibility
- Superior abrasion, cut and puncture-resistant
- Safety cuff provides added protection
- Full coating for maximum protection, palm coating provides a cool comfortable fit
 Case Qty: 120
- Sold per pair

Applications: Rough industrial

applications, sheet metal handling, fabrication workshops and automotive

Order No.	Size	A 44 4 4 4
FULLY COATE	D	
SAN445	10	000
SAN446	11	ZEND
PALM COATE	D	
SAN447	10	
SAN448	11	



- Vinyl coating remains soft when cold
- Excellent insulation against cold temperatures
- Curved fingers, wing thumb and soft polyester lining provide comfort
- Textured surface provides excellent grip for handling of both wet and dry materials
- Offers resistance to oils, acids, caustics and alcohols
- Fluorescent orange, fully coated, safety cuff
 Coase Otrue 72
- Case Oty: 72
- Sold per pair

Applications: Construction, cold storage, winter transportation, yard and field work, freight handling and trash collection

Order	
No.	Size
SEA307	X-Large

HYCRON[®] 27-805 GLOVES

- Heavy-duty nitrile coated
- Outwears standard heavy-duty leather palm gloves by 3 to 1
- · Soft jersey knitting eliminates seams from
- the working areas for greater comfort • Excellent dry grip and superior service
- when handling rough, abrasive materials • Excellent resistance to snags, puncture,
- abrasions, cuts, grease and oils
- Fully coated, 2 1/2" safety cuff
- Accepted for use in Canadian food processing facilities
- Case Oty: 144
- Sold per pair

Ans	sell
Order	c:-
INO.	312





HEAVYWEIGHT NITRILE FULLY COATED KNIT WRIST GLOVES

- High density 100% cotton jersey lining
- Exceptional durability, grip and flexibility
- Superior abrasion, cut and puncture resistant
- Knit wrist prevents debris from entering the glove
- Case Qty: 120
- Sold per pair

Applications: Rough industrial applications, sheet metal handling, fabrication workshops and automotive

Order No.	Size
SAN441	8
SAN442	9
SAN443	10
SAN444	11



ZEN TH

WINTER HI VIZ™ 23-491 GLOVES

- Stays soft when cold
- Keeps hands warm and dry
- Chemical resistant
- Resist abrasion and oils
- Comfortable
- Knit wrist
- Case Oty: 72
- Sold per pair

Applications: Cold storage, winter transportation, laboratories, yard and field work, unheated warehouse and construction

Order

No.	Size
SEA273	X-Large





ie, ork,



ZEN

SAN445

Ansell

POLAR GRIP® 23-700 GLOVES

- · PVC coated rough finish that remains soft when cold
- Excellent foam insulation against cold temperatures
- Curved fingers, wing thumb and soft insulative lining provide comfort
- · Offers resistance to oils, acids, caustics and alcohols
- Rough finish surface provides excellent grip
- for handling of both wet and dry materials
- 11" long with nylon liner, SEA303 14" with nylon liner Accepted for use in Canadian food processing facilities
- Case Oty: 144
- Sold per pair

Applications: Fishing industry, cold storage construction, winter transportation, yard and field work, freight handling, trash collection



Ansell Order No. Length" Size **SEA274** 11 9 **SEB089** 11 10

14

SEA303

- **BEX™ SOF PAW GLOVES**
- The Sof Paw gloves are made of a breathable full vinyl impregnated stretch fabric
- · Great tactile, sensitivity and comfort
- Offer excellent abrasion resistance and good grip, wet or dry
- Washable
- Case Qty: 144
- Sold per pair



Order	Mfg.	
No.	No.	Size
SC434	70-6	X-Small
SC435	70-7	Small
SC436	70-8	Mediun
SC437	70-9	Large

HPPE GLOVES W/ POLYURETHANE COATING

- HPPE liners provide excellent abrasion,
- tear and good cut resistance barrier Nitrile foam coating provides excellent grip in oily working conditions
- 3/4 coated back provides
- additional hand protection May be laundered for repeated
- uses, does not shrink Excellent fit and dexterity
- Meets EN388 Level 5 for cut resistance
- Case Oty: 144
- Sold per pair

Order No.	Mfg. No.	Size	Order No.	Mfg. No.
SEC142	Y9259-SM	Small	SEC144	Y9259-L
SEC143	Y9259-M	Medium	SEB866	Y9259-XL

+JOMAC

Size

Large

X-Large

Coated/Cut Resistant Gloves

VINYL IMPREGNATED GLOVES

- · Stretch fit provides excellent dexterity
- Abrasion and water resistance
- · Rough surface for a superior grip
- Case Qtv: 300
- Sold per pair

Applications: Assembly work, bottling plants, warehousing, packaging, maintenance

Order No.	Description
SEF065	Ladies
SEF066	Men's

THE KNIT PICKER **KPG[®] VINYL GLOVES**

- Lightweight, breathable vinyl coating and textured finish for sure grip
- 100% cotton seam free knit liner Outwears cotton many
- times on straight abrasion Machine washable
- Case Qty: 72
- Sold per pair

Applications: Furniture manufacturing, automotive subassembly, general maintenance, inspection, packaging, shipping, receiving, light fabrication and general assembly

Order	Mfg.	
No.	No.	Size
SLIP-ON		
SC414	960-S	Small
SC415	960-M	Medium
SA600	960-L	Large
KNIT WRIST		
SC416	961-S	Small
SC417	961-M	Medium
SC418	961-L	Large





POWERFLEX® 80-813 GLOVES

- · Combines high levels of flame resistance and cut protection
- ARC flash-hazard category 2, helps protect workers against electrical hazards
- Special, soft foam coating ensures a secure grip in wet, oily and dry environments
- Ergonomic design provides superior comfort, dexterity and flexibility
- Meets EN407 Level 4 resistance to flammability
- Meets ANSI/ISEA 105 Level 4,
- EN388 Level 5 for cut resistance
- Case Qtv: 144
- Sold per pair

Order No.	Size	Order No.	Size
SEB814	6	SEB817	9
SEB815	7	SEB818	10
SEB816	8	SEB819	11

Ansell





10

Cut Resistant Gloves

HPPE POLYURETHANE-COATED GLOVES

- Stretchable seamless HPPE liner
- HPPE (high performance polyethylene)
- liner is an extremely strong fibre
- Breathable polyurethane palm coating Superior cut, abrasion, and tear resistance
- Elastic knit wrist
- Provides a superior grip
- Meets EN388 Level 4 and 5 for cut resistance
- Case Oty: 144
- Sold per pair



Order		
No.	Size	
LEVEL 4 CUT RESISTANCE		
SAW908	7	
SAW909	8	
SAW910	9	
SAW911	10	
SAW912	11	
LEVEL 5 CUT RESISTANCE		
SEF166	7	
SEF167	8	
SEF168	9	
SEF169	10	
SEF170	11	

HYFLEX® 11-511 GLOVES Ansell

- An unprecedented combination of cut resistance and dexterity with improved durability
- Lightweight and ergonomically designed with incredible cut protection and a relaxed fit
- Features Intercept Technology[™] yarn developed by Ansell and DuPont[™] which incorporates Kevlar[®] Stretch Armor Technology
- Extended cuff provides additional cut
- protection in the highly sensitive wrist area New foam nitrile formulation provides
- longer wear for increased durability
- Offers superior grip and tactility in light oil or dry environments, therefore providing sure grip of product and assurance when handling sharp objects and knives
- Experience exceptional comfort and durability combined with EN/ANSI Level 4 cut protection
- Accepted for use in Canadian food processing facilities
- Meets ANSI/ISEA 105 Level 4, EN388 Level 4 for cut resistance
- Case Qtv: 144
- Sold per pair

Applications: Door and wood framing, glass installation, knife handling, maintenance operations, paper slitting, sharp small part handling, sheet metal press and small part stamping

Order		Order	
No.	Size	No.	Size
SEB171	6	SEB174	9
SEB172	7	SEB175	10
SEB173	8	SEB176	11

HYFLEX® 11-501 GLOVES

- Intercept Technology[™] yarn liner developed by Ansell and Dupont[™]
- Lightweight fit and feel with superior cut resistance
- Outstanding dexterity
- Superior oil grip, tactile sensitivity, dexterity and comfort
- Cut prevention improves productivity and profitability
- Teal foam nitrile palm coating Accepted for use in Canadian
- food processing facilities Meets ANSI/ISEA 105 Level 4,
- EN388 Level 4 for cut resistance • Case Qty: 144
- · Sold per pair
- Applications: Automotive assembly, sheet metal assembly, handling sharp small parts, handling glass

Order No.	Size	Order No.	Size
SAW951	6	SAW954	9
SAW952	7	SAW955	10
SAW953	8		

NITRILE COATED KEVLAR® GLOVES

- Stretchable seamless 13-gauge Kevlar[®] liner
- Nitrile palm coating
- Excellent cut, abrasion and tear resistance
- · Elastic knit wrist
- Wrinkle finish provides a superior grip Meets EN388 Level 4
- for cut resistance
- Case Qty: 120 Sold per pair
- Applications: Component assembly, waste handling, automotive and metal handling

Order		Order	
No.	Size	No.	Size
SEC137	7	SAP925	10
SAP923	8	SAP926	11
SAP924	9	SEC138	12

VANTAGE® 70-765 GLOVES

- · Premium longevity and cut protection through advanced technology
- 10-gauge medium weight knit with Kevlar® fibre
- Durable leather pad double-stitched, with Kevlar® fibre
- Reinforced thumb crotch
- Excellent abrasion resistance and long-lasting
- Puncture and snag protection all the way to fingertips while providing enhanced grip
- Meets ANSI/ISEA 105 Level 4, EN388 Level 4 for cut resistance
- Case Qty: 36
- Sold per pair

Applications: Press, welding, handling heavy, oily metal pieces, oily, with sharp or irregular edged metal parts, heat protection

Order	
No.	Size
SAY665	8
SAY666	9



isel

Order	
No.	Size
SAY667	10
SAY668	11







Cut Resistant Gloves

LATEX COATED KEVLAR® GLOVES

- Natural rubber latex palm coating
- Seamless 10-gauge Kevlar[®] liner
- Excellent cut, tear and puncture resistance
- Elastic knit wrist
- Wrinkle finish provides a superior grip
- Meets EN388 Level 4
 for cut resistance
- Case Qty: 120
- Sold per pair

Applications: Material handling,

automotive, glass handling and waste handling



Order No.	Size	Order No.	Size
SAP927	8	SAP929	10
SAP928	9	SAP930	11

HYFLEX® 11-627 GLOVES

- Dyneema[®] innovative yarn liner with polyurethane coating
- Exceptional cut resistance with an optimal level of Dyneema®

Ansell

- Lycra® and nylon combined for excellent dexterity
- Polyure thane palm coating for excellent grip
- Meets ANSI/ISEA 105 Level 1/EN388
- Level 3 for cut resistance
- Accepted for use in Canadian food processing facilities
- Case Oty: 144
- Sold per pair



Applications: Applications, automotive, metal, glass, aeronautics, white goods manufacturing

Order		Order	
No.	Size	No.	Size
SAY080	6	SAY083	9
SAY081	7	SAY084	10
SAY082	8		

HY-FLEX® 11-518 GLOVES

- Blue polyurethane palm coating
- New Dyneema[®] Diamond Technology HPPE yarn offers an unmatched combination of cut protection, comfort and dexterity in an 18-gauge glove
- Soft, sheer Dyneema[®] Diamond fibre breathes to keep hands cool and dry and moves freely with the motion of the hand for a more comfortable fit
- Polyurethane coating provides a sure grip in light oil and dry applications and excellent resistance to abrasion
- The ultralight fabric and tailored fit of the 11-518 create a barehand-like sensation of contact when performing tasks that demand high tactility
- ANSI level 2 cut protection, EN388 level 3 for cut resistance
- Case Qty: 144
- Sold per pair

Applications: Handling/Assembly of small or ultra-fine dry sharp parts, packaging areas with risk of cut, wiring

Order	
No.	Size
SEI847	Small
SEI848	Medium
SEI849	Large
SEI850	X-Large



Ansell

15 times stronger than steel • Breathable polyurethane palm coating • Floats on water • High energy absorption and low elongation

Anatomically formed for added comfort
Resistant to abrasion, moisture, UV rays,

SALT & PEPPER KNIT W/BLACK

POLYURETHANE PALM GLOVES

• HPPE liner is an extremely strong polyethylene fibre

- mildew, chemicals and detergentsCut resistance unaffected by washing
- Colour: Black on salt and pepper

Weight-for-weight, HPPE is up to

- Meets EN388 Level 3 for cut resistance
- Case Oty: 144
- Sold per pair



+JOMAC

Order No. N	Vlfg. No.	Size	Order No.	Mfg. No.	Size
SAN298 Y	/9248-7S&P	7	SAN300	Y9248-9S&P	9
SAN299 Y	/9248-8S&P	8	SAN301	Y9248-10S&P	10

HYFLEX[®] 11-624 GLOVES

- · Advanced cut protection with ergonomic design
- Dyneema[®], Spandex[®] and nylon liner combined for excellent dexterity
- Yarn combination molds naturally to prevent hand fatigue
- Polyurethane coating provides a sure grip in dry and light oil applications
- Meets ANSI/ISEA 105 Level 2, EN388 Level 3 for cut resistance
- Accepted for use in Canadian food processing facilities
- Case Oty: 144
- Sold per pair
- <u>Ansell</u>

Applications: Assembly areas for use when handling metal components, glass handling and installation, small parts stamping, forming, machining and bending of small parts



Order No.	Size	Order No.	Size
SAW989	6	SAW992	9
SAW990	7	SAW993	10
SAW991	8	SAW994	11

HPPE NITRILE-COATED GLOVES

- Stretchable seamless liner
- Breathable nitrile palm coating
- Excellent abrasion and tear resistance
- Elastic knit wrist
- Meets EN388 Level 3 for cut resistance
- Accepted for use in Canadian food processing facilities
- Case Qty: 144
- Sold per pair

Order		Order
No.	Size	No.
SEB090	7	SEB09
SEB091	8	SEB09
SEB092	9	

Size	
10	7FI
11	



Cut Resistant Gloves

HYFLEX® 11-510 GLOVES

- Unique product design engineered for light to medium cut protection applications
- Designed to provide cut protection in applications where
- abrasion resistance and dexterity are a "must have"
- Protects hands from abrasion in the palm area as well as the back of the hand, giving workers more confidence when working in restrictive spaces
- Sure grip and protection
- Knitted with Kevlar[®] yarn from DuPont[™] offers flexibility and comfort along with EN Level 3/ANSI Level 2 cut protection
- New ComfortFlex cuff provides additional protection as well as a soft feel around the sensitive wrist area
- Black foam nitrile ensures a sure grip in light oil and dry applications
- Accepted for use in Canadian food processing facilities
- Meets ANSI/ISEA 105 Level 2, EN388 Level 3 for cut resistance
- Case Oty: 144
- Sold per pair

Applications: Carpentry, HVAC, pipefitting, final assembly, glass installation, maintenance operations, sheet metal press, small part stamping, small part handling, small scale stamping and assembly, and wiring

Order No.	Size	Order No.	Size
SEB165	6	SEB168	9
SEB166	7	SEB169	10
SEB167	8	SEB170	11

HPPE GLOVES W/POLYURETHANE COATING

- HPPE liner is an extremely strong polyethylene fibre
- Weight-for-weight, HPPE is up to 15 times stronger than steel
- · Floats on water
- High energy absorption and low elongation
- · Anatomically formed for added comfort
- Resistant to abrasion, moisture, UV rays,
- mildew, chemicals and detergents • Cut resistance unaffected by washing
- Colour: White on white
- Meets EN388 Level 2 for cut resistance
- Case Oty: 144
- Sold per pair

JOMAC

Honeywel

Size

Men's

Ladies

Order No.	Mfg. No.	Size	Order No.	Mfg. No.	Size
SAJ773	Y9266-7	7	SAJ775	Y9266-9	9
SAJ774	Y9266-8	8	SAJ776	Y9266-10	10

JUNKYARD DOG® GLOVES

- Standard weight 100% Kevlar® with full leather palm
- Exceptional cut, slash, heat and puncture resistance
- · Leather palm provides excellent wet and dry grip, it offers puncture and abrasion resistance
- · Reinforced thumb crotch significantly extends its longevity and prevents
- abrasion in numerous applications Meets ANSI/ISEA 105 Level 3
- for cut resistance

Mfg.

KV18A-100-50

KV18AL-100-50

No.

- Case Oty: 144
- Sold per pair

S Kimberly-Clark ROFESSIONAL

Applications: Metal fabrication, glass handling,

· High level of cut resistance with enhanced

• Ambidextrous and breathable with a

flexible dotted palm for better grip

dexterity, grip and comfort

Case Qty: 12

Sold per pair

JACKSON SAFETY* G60 PURPLE

Meets ANSI Level 3, EN388 level 3 for cut resistance

NITRILE* CUT RESISTANT GLOVES

Order	Mfg.	
No.	No.	Size
SAQ352	97430	Small (7)
SAQ353	97431	Medium (8)
SAQ354	97432	Large (9)
SAQ355	97433	X-Large (10)
SAQ356	97434	2X-Large (11)

GUARDDOG® GLOVES

- Full leather palm, 100% Kevlar[®] fibre shell 100% Kevlar[®] lining offers outstanding
- cut and slash resistance Seamless knit liner eliminates
- uncomfortable seams that may rub or chafe
- Lining offers added hand protection during hazardous applications
- High grade leather offers excellent abrasion and puncture resistance and is superior in wet and dry applications
- Safety cuff
- Meets ANSI/ISEA 105 Level 3 for cut resistance
- Case Qtv: 48
- Sold per pair



HYFLEX® 11-500 GLOVES

- Black foam nitrile palm coating
- Cut resistant stretch Kevlar[®] liner provides a comfortable fit
- · Excellent protection from nuisance nicks and abrasion
- · Excellent choice when working with sharp edged materials and tools
- Unique foam nitrile coating channels away oil from the surface of the gloves
- Extended cuff offers extra cut protection around the wrist
- Sure grip in light oil applications
- Soil hiding black palm
- · Accepted for use in Canadian food processing facilities
- Meets ANSI/ISEA 105 Level 2, EN388 Level 2 for cut resistance
- Case Oty: 144 Sold per pair

Applications: Automotive assembly, handling sharp and/or pointed small parts, handling wire harnesses, sheet metal assembly, durable goods assembly, maintenance

Order No.	Size	Order No.	Size
SAW931	6	SAW934	9
SAW932	7	SAW935	10
SAW933	8	SAW936	11

Ansell





Order

SAJ484

SAJ485

No.



Ansell

Cut Resistant/Chemical Resistant Gloves

STAINLESS STEEL MESH GLOVES

- This double interlocked metal mesh ambidextrous glove is formed using state-of-the-art micro plasma welding techniques. The result is stronger, smoother, hermetically sealed ring connections that have no gaps or weak spots
- · The self-adjusting tensioning system allows for easy fit with no straps or buckles to fasten; there is no fabric cuff to wear out or become contaminated, the glove is easy to clean
- Meets ANSI/ISEA standard 105 Level 5 for cut resistance
- Case Qty: 1
- · Sold per glove





weld

Resistance weld

Micro plasma welds create value. Links are stronger so the gloves wear longer. There is also a lower risk of contamination because, unlike resistance-welded mesh rings, micro plasma welded rings leave no gaps to trap soil.

Order No.	Mfg. No.	Size	Order No.	Mfg. No.	Size
SAI314	CM030000	2X-Small	SAI317	CM030003	Medium
SAI315	CM030001	X-Small	SAI318	CM030004	Large
SAI316	CM030002	Small	SAI319	CM030005	X-Large

UNLINED 11 MIL GREEN NITRILE GLOVES

- Lightweight unlined nitrile gloves
- Raised diamond pattern provides superior grip
- Resistant to cuts, puncture and abrasion
- Accepted for use in Canadian food processing facilities
- 13" length, 11-mil thick
- Case Qty: 144
- Sold per pair

Applications: Food processing, plant maintenance, chemical processing, automotive and printing

Order		
No.	Size	
SEF222	7	
SEF223	8	*
SEF224	9	ZEN
SEF225	10	Safety Products
SEF226	11	Salety Houdets

UNLINED 15-MIL GREEN NITRILE GLOVES

- Double dipped unlined nitrile gloves
- · Raised diamond pattern provides superior grip
- Resistant to cuts, puncture, and abrasion
- Accepted for use in Canadian food processing facilities
- 13" length, 15-mil thick
- Case Oty: 144
- Sold per pair

Applications: Food processing, plant maintenance, chemical processing, automotive and printing

SOL-VEX[®] UNSUPPORTED NITRILE 37-175 GLOVES

- Embossed, flock-lined
- · Good protection against snags, punctures, abrasions and cuts
- Outstanding combination of strength and chemical resistance, when exposed to aromatic and petroleum solvents, as well as caustics and animal fats, they will not swell, weaken or degrade
- Superior choice over rubber or neoprene Accepted for use in Canadian
- food processing facilities
- 13" length, 15-mil thick
- Case Oty: 144
- · Sold per pair

Applications: Food processing (red meat, poultry, vegetables, fruit, dairy and canning), automotive assembly and painting, aerospace and automotive degreasing, chemical processing, oil refining, petrochemicals, machining operations using cutting oil and coolants, metal fabrication,

graphic arts, printing cleanup, furniture manufacturing, electronics (semiconductors, circuit board manufacturing)

Order		Order		
No.	Size	No.	Size	
SAW941	6	SAW944	9	
SAW942	7	SAW945	10	
SAW943	8	SAW946	11	

FLOCK-LINED GREEN NITRILE GLOVES

- Cotton flock lined
- Raised diamond pattern provides superior grip
- Resistant to cuts, puncture and abrasion Accepted for use in Canadian
- food processing facilities • 13" length, 15-mil thick
- Case Oty: 120
- Sold per pair

Applications: Food processing, plant maintenance, chemical processing, automotive and printing

Order	
No.	Size
SEF083	7
SEF084	8
SEF085	9
SEF086	10
SEF087	11



Order		
No.	Size	
SEF227	7	
SEF228	8	
SEF229	9	
SEF230	10	
SEF231	11	





Ansell



NITRI-SOLVE® GLOVES

- Nitri-Solve[®] provides excellent protection against abrasion, punctures, cuts and snags
- Resistant to a broad range of solvents, animal fats and other chemicals
- Case-hardened finish enhances both chemical and abrasion resistance and makes it easy to pull on and off
- Non-slip grip makes wet work easier and safer
- Available in flock lined and unlined styles in varying thickness and lengths
- Each hand is embossed with glove size for ease of pairing after laundering
- Accepted for use in Canadian food processing facilities
- Made of FDA compliant materials
 Sold per pair



Mfg.		
No.	Description	Size
TY: 144		
730-7	Flock Lined,	7
730-8	13"	8
730-9	15 mil	9
730-10		10
730-11		11
717-7	Unlined,	7
717-8	13"	8
717-9	11 mil	9
717-10		10
717-11		11
Y: 72		
737-8	Unlined,	8
737-9	15"	9
737-10	22-mil	10
737-11	Heavy-duty	11
	No. Y: 144 730-7 730-8 730-9 730-10 730-11 717-7 717-8 717-10 717-11 Y: 72 737-8 737-9 737-10	No. Description TY: 144

NATURAL RUBBER LATEX GLOVES

- Cotton flock lined
- Embossed diamond pattern provides superior grip
- Chlorinated for easy donning
- 12" length, 15-mil thick
- Accepted for use in Canadian food processing facilities
- Case Qty: 120
- Sold per pair

212

Applications: Food processing, plant maintenance and janitorial applications

Order		
No.	Size	
15-MIL		
SEF204	7	
SEF205	8	
SEF206	9	
SEF207	10	
18-MIL		ZE
SEF005	7	
SEF006	8	
SEF007	9	
SEF008	10	







UNLINED GREEN NITRILE GLOVES

- Unlined for improved dexterity
- Raised diamond pattern
 provides superior grip
- Resistant to cuts, puncture and abrasion
- 15" length, 22-mil thick
- Case Oty: 144
- Sold per pair

Applications: Food processing, plant maintenance, chemical processing, automotive and printing

Order No.	Size	
SEF080	8	
SEF081	9	ZENTH
SEF082	10	Safety Products

ALPHATEC™ 58-535 GLOVES

- Nitrile with Ansell Grip Technology[™]
- New anatomical hand shape
- Easier donning
 Good grip
 Excellent chemical protection,
- repel oils and other lubricants • Provides dexterity, comfort and touch
- sensitivity without any compromise in chemical protection
- Reducing hand fatigue and carpal tunnel syndrome related injuries
- Fully coated with 14" knitted seamless liner
 Accepted for use in Canadian
- Accepted for use in Canadian food processing facilities
- Case Qty: 72
- Sold per pair

Applications: Chemical handling, agriculture, automotive / OEM, mining, aerospace, printing

Order		Order	
No.	Size	No.	Size
SAY030	8	SAY032	10
SAY031	9	SAY033	11

NATURAL RUBBER 200 SERIES GLOVES

- Medium-duty natural rubber unsupported latex
- Cotton flock-lined, pebble-embossed
 Increased snag, puncture,
- abrasions and cut resistance
- High degree of tensile strength
- Excellent sensitivity
- Added wrist and forearm protection
- Improved grip on wet or dry objects
- 12" length, 20-mil thick
 Accepted for use in Canadian
- Accepted for use in Canac food processing facilities
- Case Qty: 144
- Sold per pair

Applications: Canning and food processing, agriculture, automotive assembly, chemical plants, janitorial, petroleum refineries, plant maintenance, pharmaceutical manufacturing

Caution: These products contain natural rubber latex which may cause allergic reactions in some individuals.

Order		Order
No.	Size	No.
SAW947	7	SAW949
SAW948	8	SAW950





Order		
No.	Size	
SAW949	9	
SAW950	10	





NATURAL RUBBER LATEX CANNERS

- Unlined
- Embossed diamond pattern provides superior grip
- Chlorinated for easy donning
- Beaded cuff for added tear resistance
- 12" length, 15-mil thick
- Accepted for use in Canadian food processing facilities
- Case Qty: 120
- Sold per pair

Applications: Food processing, plant maintenance and janitorial applications

Order No.	Size	Order No.	Size
15-MIL		18-MIL	
SEI696	7	SEI692	7
SEI697	8	SEI693	8
SEI698	9	SEI694	9
SEI699	10	SEI695	10



NATURAL RUBBER HEAVYWEIGHT GLOVES

- Provides superior protection from water-based chemicals such as acids, alkalis, alcohols and caustics
- Heavy rolled bead cuff for
- excellent tear resistance • Smooth finish resists
- Smooth finish resists punctures and snags
- Unlined for less risk of product contamination
- 30-mil thick
- Case Oty: 72
- Sold per pair

Applications: Chemical handling, plating, sandblasting, plant maintenance and laboratories

Order No.	Length"	
SAP220	14	ZEN
SAP221	18	Si

ORANGE SUPAWEIGHT GLOVES

- High resistance to water-based chemicals
- Tough general purpose 13", 30-mil thick
- natural rubber latex glove
- Roughened finish for excellent grip in damp conditions
- Beaded cuff for tear resistance and easy pull on
- Extra length fluted cuff for ventilation and maximum protection
 Ideal for laboratories and a broad range
- of chemical applications
- Accepted for use in Canadian food processing facilities
- Case Qty: 144
- Sold per pair



Order	Mfg.	
No.	No.	Size
SAJ545	G02T/450-S	Small
SAJ546	G02T/450-M	Medium
SAJ547	G02T/450-L	Large
SAJ548	G02T/450-XL	X-Large
-		Ŧ



- Pebble-embossed, pinked cuff
- Medium-duty unsupported, unlined, natural rubber latex
- Excellent dexterity, tensile strength and elasticity
- Excellent grip on wet or dry surfaces
 Good choice for snag, punctures,
- abrasion and cut resistance
- Protection against chemical hazards
 Accepted for use in Canadian food processing facilities
- 12" length, 20-mil thick
- Case Qty: 144
- Sold per pair

Applications: Food processing, poultry, small parts assembly, pharmaceutical manufacturing, janitorial and plant maintenance

Caution: These products contain natural rubber latex which may cause allergic reactions in some individuals.

Order No.	Size	Order No.	Size	
SAX939	6.5	SAX944	9	
SAX940	7	SAX945	9.5	
SAX941	7.5	SAX946	10	
SAX942	8	SAX947	11	
SAX943	8.5			

ORANGE HEAVYWEIGHT 208 SERIES GLOVES

- 29-mil palm is 50% thicker than most standard flock-lined glove
- Increased tensile strength and puncture/cut protection against chemical and physical hazard
- 100% cotton flock lining increases user comfort
 Becassed diamond design provides
- Recessed diamond design provides grip on wet or dry objects
- 13" length, 29-mil thick
- Case Oty: 144
- Sold per pair

Caution: This product contains natural rubber latex which may cause allergic reactions in some individuals

Order No.	Size	
SAX914	Small	
SAX915	Medium	
SAX916	Large	
SAX917	X-Large	
SAX918	2X-Large	

PROFLEX® 14-660 GLOVES

- Jersey lining provides cushioned
- comfort and moderate insulation
- Excellent wet grip
- Optimum abrasion resistance
- Excellent chemical resistance to
- petrochemicals and acidsCase Qty: 72
- Sold per pair

Applications: Fisheries, petrochemicals refining, handling equipment and abrasive materials coated with acids, caustics, solvents, grease and oil

Order	
No.	Size
SAX959	8
SAX960	9
SAX961	10
SAX962	11



Ansell

Ansell



NEOPRENE/NATURAL **RUBBER LATEX GLOVES**

- Cotton flock lined
- Natural rubber latex with blue neoprene over-dip
- Raised diamond pattern provides superior grip
- Superior chemical resistance Accepted for use in Canadian
- food processing facilities
- 12" length, 28-mil thick
- Case Oty: 120
- Sold per pair

Applications: Food processing, plant maintenance, chemical processing, automotive and printing

Order		
No.	Size	
SAM650	7	Safety Products
SAM651	8	
SAM652	9	
SAM653	10	

PVC ROUGH FINISH GLOVES

- Bright vellow PVC on cotton interlock lining
- · Resistant to most oils, acids, greases and solvents
- Rough coating provides optimal grip
- Colour: Yellow
- Case Oty: 120
- Sold per pair

Applications: Fisheries, petrochemical industry, mining



Order	
No.	Description
SEE797	12" Gauntlet
SEE798	14" Gauntlet
SEE799	Knit Wrist

PVC WINTER LINED GLOVES

- Bright orange PVC on jersey liner
- Resistant to most oils, acids, greases and solvents
- · Foam fleece lining offers added warmth
- Colour: Orange Sold per pair

Applications: Fisheries, petrochemical industry, mining, outdoor winter conditions



Order No.	Description	Qty /Case	SAN383	
SAN383	12" Gauntlet	120	:	
SO104	Knit Wrist	120	ZEN	
SAP922	Safety Cuff	60		

NEOPRENE 29-865 GLOVES

- Flock-lined unsupported neoprene, embossed Increase chemical and abrasion resistance
- over standard neoprene gloves Broad-spectrum protection
- Excellent resistance to a wide range
- of chemicals, including oils, acids, caustics and solvents
- Accepted for use in Canadian food processing facilities
- 13" length, 18-mil thick
- Case Oty: 144 Sold per pair
 - Ansell



Applications: Petrochemicals, degreasing, electronics, refining, handling oils, acids, caustics, alcohols and solvents

Order		Order	
No.	Size	No.	Size
SAX979	7	SAX981	9
SAX980	8	SAX982	10

CHLOROFLEX® NEOPRENE GLOVES

- Unsupported neoprene gloves
- · Pattern finish assures a firm grip, wet or dry
- Flock lined embossed grip
- Chloroflex[®] delivers excellent protection in applications for the petrochemical industry, refining, electronics, lab use, degreasing and handling materials in acids, alcohols, caustics and oils
- 12" length, 24-mil thick
- Case Oty: 72
- · Sold per pair

Order	Mfg.	
No.	No.	Size
SAK074	723-7	7
SAK075	723-8	8
SAK076	723-9	9
SAK077	723-10	10



- Double dipped PVC offers superior durability, abrasion and chemical resistance
- Cotton jersey lining
- Rough coating provides optimal grip
- · Resistant to most oils, acids, greases and solvents
- Colour: Green
- Sold per pair

Applications: Fisheries, petrochemical industry, mining

ZENOTH SEE803

ZENOTH

Order		Qty
No.	Description	/Case
SEE800	12" Gauntlet	120
SEE801	14" Gauntlet	60
SEE802	18" Gauntlet	60
SEE803	Knit Wrist	120











SEE797

SEE799

ULTRA FLEXIBLE PVC GLOVES

- Premium ultra flexible PVC coating
- Seamless 13-gauge liner
- · Pre-formed shape for ultimate dexterity and comfort
- Double dipped for added durability
- 12" length
- Rough finish provides superior grip
- Case Oty: 120 Sold per pair

Applications: Fishery, automotive, maintenance, and petrochemical



Salety Hoddets	
Order No.	Size
SAP878	9
SAP879	10

SILVER SHIELD® 4H SERIES GLOVES

ZENGTH

VORI

by Honeywell

- · Resistant to over 290 different chemicals: alcohols,
- aliphatics, aromatics, chlorines, ketones, esters
- · Low cost, disposable gloves: can be made readily available to workers, no recycling
- · Does not contain chemical accelerators that can cause allergic reactions
- Flexible Norfoil laminate
- Ambidextrous
- · Can be used as a secondary glove Allows workers maximum protection in heavy-duty jobs where the dangers of mechanical damage to gloves are high
- Case Qty: 50
- Sold per pair

Order	Mfg.		G
No.	No.	Length"	Size
SAJ958	SSG/6XS	14 1/2	X-Small
SAJ959	SSG/7S	14 1/2	Small
SAJ960	SSG/8M	14 1/2	Medium
SAJ961	SSG-9L	14 1/2	Large
SAJ962	SSG/10XL	14 1/2	X-Large
SAJ963	SSG/11XXL	14 1/2	2X-Large

LSB SAND BLASTER GLOVES

- Extended sleeve provides added protection on the arms
- Supported cotton glove and sleeve absorbs perspiration
- Heavy PVC sleeve
- · Rough surface finish
- provides added grip Available in smooth
- or wrinkle finish Case Qty: 24

· Sold per pair

by Honeywell

Order	Mfg.			
No.	No.	Description	Finish	Length"
SAJ760	T14413230	Neoprene Glove, 30" Opening	Smooth	32
SAJ762	T65FW2228	Natural Rubber Glove, 28" Opening	Wrinkle	32

SAJ762

PVC SMOOTH FINISH GLOVES

- Bright red PVC on cotton interlock lining
- Resistant to most oils, acids, greases and solvents SEE804
- Ideal for general chemical handling
- Colour: Red
- Case Qty: 120
- Sold per pair

Applications: Fisheries, general maintenance, petrochemical industry



Urder	
No.	Description
SEE804	12" Gauntlet
SEE805	14" Gauntlet
SEE806	Knit Wrist

BEMAC PETROCHIEF® GLOVES

- Red PVC/NBR blended coating designed to handle petroleum products
- · Resists most oils, acids, fats, alcohols and glycol ethers
- Performs well in temperature ranging from 25°F to 150°F
- Available in 10 1/2" gauntlet and safety cuff jersey lined
- Sold per pair



*J	0	Þ	۲,		4		C	
	С	Α	N	A	D	A		

Order No.	Mfg. No.	Description	Qty /Case
SAI404	PC830	Safety Cuff Jersey Lined	72
SAI405	PC893	Safety Cuff Jersey/Foam Lined	36
SAL117	PC889L	10 1/2" Gauntlet/Foam Lined	36

"TRAWLER KING" PVC LONG SLEEVE GLOVES

- · Rough sandy finish provides superior grip
- Curved hand design provides maximum comfort
- · Extended sleeve provides added protection on the arms
- · Available with elastic closure or suspender straps
- Case Oty: 24



Order	Mfg.		
No.	No.	Description	Size
SAJ972	1812FWG24	24", Elastic Closure	X-Large
SAJ973	1812FWG01	30", Suspender Straps	X-Large



TOUCH N TUFF® 92-600 GLOVES

- Nitrile with smooth fingertips
- Contains absolutely no fillers, silicones or plasticizers
- Provide three times the puncture resistance
- of competitive latex or vinyl gloves
- Durable yet soft for improved comfort Smooth fingertips for
- exceptional grip
- Powder-free
- Rolled cuff
- 5 mils, AQL 1.5
- Accepted for use in Canadian food processing facilities
- Case Qty: 10 boxes
- Sold per box of 100 gloves

Applications: Manufacturing, maintenance and cleanup, intricate parts handling, laboratory analysis/technical work, HazMat



Ansell

Order No.	Size	Order No.	Size
SAW927	7	SAW929	9
SAW928	8	SAW930	10

EXAMINATION GRADE NITRILE GLOVES

- Pure 100% premium nitrile
- Textured surface provides superior wet and dry grip
- Exceptional tactile sensitivity
- Latex-free
- USP grade corn starch for powdered gloves
- Beaded cuff for added strength
- · Protects against oil, grease and organic solvents
- Superior puncture resistance
- Ambidextrous design
- 4 mils, AQL 1.5
- 9.5" in length
- Accepted for use in Canadian food processing facilities
- Not for medical use
- Case Qty: 10 boxes
- Sold per box of 100 gloves

Applications: Manufacturing, maintenance, small parts handling, laboratory applications and automotive



Order No.	Size	Order No.
POWDERED	0126	POWDER-FR
SEA916	X-Small	SEA918
SAP320	Small	SAP324
SAP321	Medium	SAP325
SAP322	Large	SAP326
SAP323	X-Large	SAP327
SEA917	2X-Large	SEA919



rder	
ο.	Size
OWDER-FREE	
EA918	X-Small
AP324	Small
AP325	Medium
AP326	Large
AP327	X-Large
EA919	2X-Large

TNT[®] BLUE 92-675 GLOVES

- Nitrile with textured fingertips
- Provides three times the puncture resistance of competitive latex or vinvl aloves
- Durable yet soft for improved comfort
- Textured fingertips for exceptional grip
- Powder-free
- Rolled cuff
- 5 mils, AQL 1.5
- Accepted for use in Canadian food processing facilities
- Case Oty: 10 boxes
- Sold per box of 100 gloves

Applications: Automotive, manufacturing, maintenance and cleanup, intricate parts handling, laboratory analysis/technical work

	1.00	
	Order	
Size	No.	Size
Small	SAW939	Large
Medium	SAW940	X-Large
	Small	Size No. Small SAW939

BLACK NITRILE GLOVES

- Textured fingertips provide superior wet and dry grip
- · Beaded cuff for added strength
- Superior puncture and tear resistance
- Excellent tactile sensitivity and dexterity
- Latex-free
- 4 mils, AQL 1.5
- Powderf-free
- Accepted for use in Canadian food processing facilities
- Case Qty: 10 boxes
- Sold per box of 100 gloves

Applications:

Manufacturing, maintenance, small	No.	Size
parts handling,	SEB085	Small
laboratory and	SEB086	Medium
automotive,	SEB087	Large
law enforcement	SEB088	X-Large
	SED981	2X-Large

Order

PURPLE NITRILE* EXAM GLOVES

- Latex-free
 Powder-free
- Textured fingertips
- Ambidextrous
 Beaded cuff
- 5.9 mils, AQL 1.5
- Case Qtv: 10 boxes Sold per box

Order	Mfg.		Qty
No.	No.	Size	/Box
9.5" LENG	гн		
SAQ782	55080	X-Small	100
SAQ783	55081	Small	100
SAQ784	55082	Medium	100
SAQ785	55083	Large	100
SAQ786	55084	X-Large	90
12" LENGT	н		
SAQ787	55090	X-Small	50
SAQ788	50601	Small	50
SAQ789	50602	Medium	50
SAQ790	50603	Large	50
SAQ791	50604	X-Large	50



🕉 Kimberly-Clark

PROFESSIONAL



ZENOTH



- Ambidextrous design

SHOWABEST

X-Large

N-DEX®

- N-DEX®'s low-modulus formulation reduces hand fatigue caused by elastomeric stress
- Provides much greater puncture resistance than natural rubber and vinyl disposables

N-DEX® ORIGINAL 7005 SHOWABEST INDUSTRIAL GRADE GLOVES

- Intended for occupational safety and health use only, not for medical use
- 100% nitrile, non-latex utility gra
- Ambidextrous
- Lightly powdered
- 9.5" long
- 4 mils, AQL 4.0
- Made of FDA compliant materials Accepted for use in Canadian
- food processing facilities
- Case Qty: 20 boxes
- · Sold per box of 100 gloves

ıde	
s	

Urder	IVITG.		
No.	No.	Description	Size
SAL254	7005XS		X-Small
SA561	7005S	9 1/2"	Small
SN581	7005M	4 mil.	Medium
SN582	7005L		Large
SAF954	7005XL		X-Large

N-DEX[®] NIGHTHAWK™ GLOVES

- Powder-free textured fingertips
- Patented accelerator-free nitrile formulation
- · Low-modulus comfort and feel
- Static-dissipative properties (ESD)
- · Ideal for automotive, electronic assembly, laboratory, law-enforcement and security environments
- 4 mils, AQL 1.5 9" length
- Case Qty: 20 boxes
- Sold per box of 50 gloves

GREEN-DEX™ GLOVES

- Biodegradable disposable nitrile glove
- Eco Best Technology[™] accelerates the biodegradation of nitrile in biologically active landfills and anaerobic digesters as validated by independent certified laboratories using internationally recognized test methods
- · Maintains the same physical properties (shelf life, texture, appearance) as regular nitrile gloves and can be used in the same applications with no loss of performance
- Ambidextrous
- 4 mils, AQL 1.5
- Case Qty: 20 boxes
- Sold per box of 100 gloves



Mfg.	
No.	Size
6405PF-XS	X-Small
6405PF-S	Small
6405PF-M	Medium
6405PF-L	Large
6405PF-XL	X-Large
	No. 6405PF-XS 6405PF-S 6405PF-M 6405PF-L



- Available in both lightly powdered, USP vegetable starch and powder-free styles
- Acceptable for food and pharmaceutical applications
- Extremely puncture resistant, once violated N-DEX[®] gloves readily tear so the wearer knows the glove should be replaced

N-DEX[®] ORIGINAL 8005 INDUSTRIAL GRADE GLOVES

- Intended for occupational safety and health use only, not for medical use
- 100% nitrile, non-latex utility grade
- Ambidextrous
- Powder-free
- 9.5" long

Order No. **SAK070 SAK071 SAK072**

SAK073

- 8 mils, AQL 4.0
- Made of FDA compliant materials
- Accepted for use in Canadian

8005PF-XL

- food p
- Case C
- Sold p

oroo Qty	cessing facilities 20 boxes box of 50 gloves	2.6		
	Mfg. No.	Description	Size	
)	8005PF-S		Small	
	8005PF-M	9 1/2"	Medium	
	8005PF-L	8 mil.	Large	

SHOWARBE			
Order No.	Mfg. No.	Size	
SAL084	7700PFTS	Small	
SAL085	7700PFTM	Medium	
SAL086	7700PFTL	Large	
SAL087	7700PFTXL	X-Large	

BLUE VINYL EXAMINATION **GRADE GLOVES**

- Pure 100% premium vinyl
- Exceptional fingertip sensitivity
- · Soft and stretchable for comfortable wear
- Beaded cuff for added strength
- · Ambidextrous design
- 4 mils, AQL 1.5
- USP grade corn starch powdered gloves
- · Not for medical use
- Case Qty: 10 boxes
- Sold per box of 100 gloves

Order		
No.	Size	
POWDERED		
SAQ700	Small	
SAQ701	Medium	
SAQ702	Large	
SAQ703	X-Large	

|--|

Size	
Small	
Medium	
Large	
X-Large	
	Small Medium Large



DURA-TOUCH® VINYL 34-715 GLOVES

- Smooth vinvl
- Powdered
- · Rolled cuff
- Clear
- 3 mils, AQL 1.5
- Accepted for use in Canadian food processing facilities
- Case Oty: 10 boxes
- Sold per box of 100 gloves

Applications: Food handling, food preparation, food processing, light manufacturing, painting, maintenance and cleanup, janitorial

EXAMINATION GRADE VINYL GLOVES

- Pure 100% premium vinyl
- Exceptional fingertip sensitivity
- · Soft and stretchable for comfortable wear
- USP grade corn starch for powdered gloves
- · Beaded cuff for added strength
- Ambidextrous design
- 4 mils, AQL 1.5
- 9.5" length
- Accepted for use in Canadian food processing facilities
- Not for medical use
- Case Qty: 10 boxes
- · Sold per box of 100 gloves

Applications: Light manufacturing, maintenance, food processing, laboratory applications, painting and janitorial

Order No.	Size	Order No.	Size
POWDERED		POWDER-FREE	
SAP328	X-Small	SAP333	X-Small
SAP329	Small	SAP334	Small
SAP330	Medium	SAP335	Medium
SAP331	Large	SAP336	Large
SAP332	X-Large	SAP337	X-Large

EXAMINATION GRADE **NITRILE/VINYL GLOVES**

- Blend of premium nitrile and vinyl
- · Strength and durability of nitrile with the comfort and affordability of vinyl
- Latex-free
- Exceptional tactile sensitivity
- Powder-free · Beaded cuff for added strength
- Ambidextrous design
- 4-mils, AQL 1.5
- Not for medical use
- Case Qty: 10 boxes
- Sold per box of 100 gloves

Applications: Manufacturing, maintenance, small parts handling, laboratory, painting and janitorial

Order		
No.	Size	
SEH163	Small	
SEH164	Medium	
SEH165	Large	
SEH166	X-Large	
SEH167	2X-Large	





An	se	ll

Order No. Size **SEE321** Small **SEE322** Medium **SEE323** Large **SEE324** X-Large



CONFORM® XT 69-318 GLOVES

- Textured latex
- Low protein
- Contains no silicone-based materials in formulation
- Powder-free
- Rolled cuff
- 5 mils, AQL 1.5
- Accepted for use in Canadian food processing facilities
- Case Qty: 10 boxes
- Sold per box of 100 gloves

Applications: Food processing and handling, laboratory analysis/technical work, Quality control, Electronics assembly, Light-duty maintenance and cleanup

Caution: This product contains natural rubber latex which may cause allergic reactions in some individuals.

Ansell

Order		Order	
No.	Size	No.	Size
SAY727	Small	SAY729	Large
SAY728	Medium	SAY730	X-Large

EXAMINATION GRADE LATEX GLOVES

- Pure 100% premium Malaysian natural latex
- Textured surface on powder-free
- provides superior wet and dry grip
- Exceptional tactile sensitivity
- USP grade corn starch for powdered gloves
- Beaded cuff for added strength
- Ambidextrous design • 4 mils, AQL 1.5
- 9.5" length
- Accepted for use in Canadian food processing facilities
- Not for medical use
- Case Qty: 10 boxes
- Sold per box of 100 gloves

Applications: Light manufacturing, maintenance, food processing, laboratory applications and guality control

Order No. Size		Order No.	Size
POWDERED		POWDER-FRE	E
SAP338	X-Small	SAP343	X-Small
SAP339	Small	SAP344	Small
SAP340	Medium	SAP345	Medium
SAP341	Large	SAP346	Large
SAP342	X-Large	SAP347	X-Large

ZEN











CONFORM® 69-210 GLOVES

- Smooth finish latex
- Low protein
- Highest degree of dexterity
- Strength and comfort
- Powdered
- Rolled cuff
- 5 mils, AQL 1.5
- Accepted for use in Canadian food processing facilities
- Case Qty: 10 boxes
- Sold per box of 100 gloves

Applications: Food processing and handling, laboratory analysis/technical work, Intricate parts handling, quality control, electronics assembly, light-duty maintenance and cleanup

Caution: This product contains natural rubber latex which may cause allergic reactions in some individuals.

Order No.	Size	Order No.	Size
SAY723	Small	SAY725	Large
SAY724	Medium	SAY726	X-Large

Ansell

DERMATHIN® GLOVES

- Unsupported natural rubber glove
- Ambidextrous, surgical type disposable glove with strength, unsurpassed sensitivity and optimum dexterity
- Lightly powdered with USP-grade corn starch
- 5-mils, AQL 1.5, 9.5" length
- Accepted for use in Canadian food processing facilities
- Case Qty: 20 boxes
- Sold per box of 100 gloves

Applications: Manufacturing, light-duty maintenance and cleanup, intricate parts handling, laboratory analysis/technical work, automotive

Order	Mfg.		
No.	No.	Size	
SAP316	1005S-06	Small	\langle
SAP317	1005M-07	Medium	
SAP318	1005L-08	Large	

ACCUTECH® STERILE GLOVES

- A low particle glove with a low level of extractable materials and particles
- Powder-free
- 100% natural rubber, free of pigments or fillers
- Ergonomically-designed, hand-specific glove provides exceptional dexterity
- Beaded cuff make donning easier and stays in position on the arm
- Gamma-irradiated to 10-6
- Sterility Assurance Level (SAL)
- 8 mils, AQL 1.0
- Case Qty: 6
- Sold per box of 20 gloves

Caution: This product contains natural rubber latex which may cause allergic reactions in some individuals

Order No.	Mfg. No.	Size	Colour
SED410	87011060	6	White
SED411	87011065	6.5	White
SED412	87011070	7	White
SED413	87011075	7.5	White
SED414	87011080	8	White
SED415	87011085	8.5	White



- Class 2 medical device
- Natural colour latex features a textured finish that ensures excellent barrier protection without compromising tactile sensitivity
- Lightly powdered
- 5-mils, 9.5" length
- Accepted for use in Canadian food processing facilities
- Case Qty: 10 boxes
- Sold per box of 100 gloves

Applications: Auto body, clinical laboratory and critical environments

SHOWP+BEST GLOVE				2	
Order No.	Mfg. No.	Size	Order No.	Mfg. No.	Size
SAJ735 SA546	5005XS 5005S	X-Small Small	SA544 SAJ736	5005L 5005XL	Large X-Larg

Medium

DISPOSABLE POLYETHYLENE GLOVES

• Most economical glove

5005M

- Short term use
- Talc-free

SA545

- Offers mild chemical resistance
- Thin enough for fingertip sensitivity
- 0.02 mm, ambidextrous
- Accepted for use in Canadian food processing facilities

Sold per bag of 100 gloves,

luu bags per	case
Order No.	Size
SAQ704	Small
SAQ705	Medium
SAQ706	Large
SAQ707	X-Large

Sold per box of 500 gloves, 20 boxes per case

Order No.	Size
SEB043	Small
SEB044	Medium
SEB045	Large
SEB046	X-Large

DELUXE TRIPLE GLOVES DISPENSERS

- Constructed of clear crystal acrylic
- Mounted horizontally allowing to change one box without affecting the others
- Will hold most disposable glove boxes
- Dispenser dimensions: 20" W x 4" D x 11 13/16" H

Order No. SAO743 Mfg. No. GD03DL

BRADY®

Gloves not included









Ansell

Performance Gloves

ZM100 MECHANIC GLOVES

- Ergonomic style and superior comfort
- Hook and loop cuff permits an adjustable fit
- Synthetic leather palm and fingers offer
- superior tactility and protection
- Improved dexterity, grip and durability
 Case Qtv: 12
- Sold per pair

Applications: Automotive, small parts handling, maintenance, manufacturing, most industrial applications

Order No.	Size	TENOTH
SEB047	Medium	
SEB048	Large	ZEN
SEB049	X-Large	
SEB050	2X-Large	

ZM300 MECHANIC GLOVES

- Ergonomic style and superior comfort
- Grain leather palm and fingers improve tactility and protection
- Hook and loop cuff permits an adjustable fit
- Leather reinforced thumb and fingers offer
- increased durability
- Improved dexterity and grip
- Case Oty: 12
 Sold pay pair
- Sold per pair

Applications: Automotive, small parts handling, maintenance, manufacturing, most industrial applications



Order	
No.	Size
SEB228	Medium
SEB229	Large
SEB230	X-Large
SEB231	2X-Large

ZENTH[®]

ZM200 MECHANIC GLOVES

- Ergonomic style combined with stylish look
- Hook and loop cuff permits an adjustable fit
- Synthetic leather palm and fingers
- offer superior tactility and protection • Stretchable nylon on knuckles
- improves dexterity and comfort
 Textured patches on palm and thumb permits superior grip and durability
- Case Qty: 12
- Sold per pair

Applications: Automotive, small parts handling, maintenance, manufacturing, most industrial applications

Order		1
No.	Size	
SEB051	Medium	
SEB052	Large	
SEB053	X-Large	
SEB054	2X-Large	

MEN'S UTILITY GLOVES

- All purpose glove with unlimited household and shop uses
- Easy entry, elastic cuff designed with TPR (Thermal Plastic Rubber) hook and loop closure provides a secure fit
- Two-way form fitting Spandex top increases ventilation, comfort and fit
- · Interior seam stitching prevents snagging
- Reinforced Dura-Fit[™] synthetic leather thumb, index and middle fingertips provide strength and protection
- Dura-Fit[™] synthetic palm offers maximum durability and breathes like leather
- Lycra[®], panels between fingers add comfort and ventilation
- Sold per pair

Order No.	Mfg. No.	Size	MACHINE
SAN720	H15-05-008	Small	A Distantiant
SAN721	H15-05-009	Medium	
SAN722	H15-05-010	Large	
SAN723	H15-05-011	X-Large	MECHANIX WEAR

PROFLEX 925F(X) DORSAL IMPACT-REDUCING GLOVES

- Reinforced flex zones for high dexterity
 Moldad TPP arms on knowledge finance
- Molded TPR armor on knuckles, fingers and carpal bone for great protection
- Armor "flex zones" for high dexterity
 Abrasion-resistant PVC on palm and three fingers limits liquid penetration
- Non-slip reinforcement zones on thumb saddle and index for enhanced grip and durability
- Reinforced Kevlar[®] palm stitching for extended wear and durability
- Reflective accents and colorful scheme for optimal hand visibility
- Sold per pair

Mfg. No. 16052 16053 16054 16055	Size Small Medium Large		godyne DRK CEAT
16053 16054	Medium		
16054			
	Large		
16055			
10000	X-Large		1000
16056	2X-Large		
16057	3X-Large		1
OF		— 🖤 🖤 🥑 SED154 🔎	
16192	Small	Alas	
16193	Medium	A	
16194	Large		
16195	X-Large		
16196	2X-Large	8 M K	
16197	3X-Large	~	
	16057 DF 16192 16193 16194 16195 16196	16057 3X-Large DF 16192 Small 16193 Medium 16193 16194 Large 16195 16195 X-Large 16196	16057 3X-Large DF SED154 16192 Small 16193 Medium 16194 Large 16195 X-Large 16196 2X-Large

SEB129





Performance/Impact Gloves

IMPACT PRO GLOVES

- Two-way stretch mesh top with tricot interior lining increases comfort, fit and breathability
- Molded TPR (Thermal Plastic Rubber) rib panels provide a pliable layer of protection on hand, knuckles and fingertips
- Non-slip, dual-lavered, padded Zeus[™] Clarino[®] panel on upper palm, thumb, index and middle fingers increase grip, comfort and durability
- Lycra[®] panels between fingers add comfort and ventilation
- · Contoured, dual-layered, padded palm heel increases flexibility while providing greater protection
- Dura-Fit[™] synthetic leather palm offers maximum comfort, durability and breathes like leather
- Molded Thermal Plastic Rubber (TPR) cuff tab with
- hook and loop closures provides secure fit
- Sold per pair

Order. No	Mfg. No.	Size	MECHANI
SAN864	H30-05-008	Small	
SAN865	H30-05-009	Medium	AS MA
SAN866	H30-05-010	Large	WA:
SAN867	H30-05-011	X-Large	

PROFLEX® 817 THERMAL UTILITY GLOVES

- 40-g 3M[™] Thinsulate[™] insulation
- Low-profile closure with woven elastic cuff
- Padded spandex back
- and neoprene knuckle pad
- Double reinforced Amara palm

N/fer

- Terry thumb brow wipe
- Case Qty: 6
- Sold per pair

Orden

Applications: Cold storage, marine, winter work, construction, hunting/fishing and outdoor recreation

ergodyna Work ceall

Oldel	ivirg.		
No.	No.	Size	
SAK292	16332	Small	
SAK293	16333	Medium	
SAK294	16334	Large	
SAK295	16335	X-Large	
SAK296	16336	2X-Large	

M-PACT[®] GLOVES

- Molded Thermal Plastic Rubber (TPR) provides impact protection to the fingers and knuckles
- Poron[®] XRD[™] palm padding absorbs shock and vibration
- Form-fitting TrekDry[®] top material helps keep hands dry and comfortable
- Rubberized grip material on the thumb and index finger provides durable gripping power
- TPR hook and loop closure for a secure fit to the wrist
- Machine washable
- Sold per pair

Order No. Grey	Mfg. No.	Order No. Red	Mfg. No.	Order No. Covert	Mfg. No.	Size	
SED998 SED999 SEE000 SEE001	MPT-58-008 MPT-58-009 MPT-58-010 MPT-58-011	SEE003 SEE004 SEE005 SEE006	MPT-52-008 MPT-52-009 MPT-52-010 MPT-52-011	SEE013 SEE014 SEE015 SEE016	MPT-55-008 MPT-55-009 MPT-55-010 MPT-55-011	Small Medium Large X-Large	MECHANIX WE
SEE002	MPT-58-012	SEE007	MPT-52-012	SEE017	MPT-55-012	2X-Large	

FASTFIT® GLOVES

- Elastic cuff provides easy on/off flexibility
- Durable and dexterous synthetic leather palm
- TrekDry[®] material top helps
- keep hands dry and comfortable • TPR (Thermal Plastic Rubber) hook and loop closure for a secure fit to the wrist
- Machine washable
- Sold per pair

			7	$\boldsymbol{\kappa}$
k				
Ν	AECE	IANI	XWI	SAK

SAR873

Order No. Black	Mfg. No.	Order No. Blue	Mfg. No.	Size
SAR878	MFF-05-008	SAR873	MFF-03-008	Small
SAR879	MFF-05-009	SAR874	MFF-03-009	Medium
SAR857	MFF-05-010	SAR875	MFF-03-010	Large
SAR880	MFF-05-0011	SAR876	MFF-03-011	X-Large
SAR881	MFF-05-0010	SAR877	MFF-03-012	2X-Large
Order No. Red	Mfg. No.	Order No. Hi-Viz Orange	Mfg. No.	Size
SAR868	MFF-02-008	SAR882	MFF-09-008	Small
SAR869	MFF-02-009	SAR883	MFF-09-009	Medium
SAR870	MFF-02-010	SAR884	MFF-09-010	Large
SAR871	MFF-02-011	SAR885	MFF-09-011	X-Large
SAR872	MFF-02-012	SAR886	MFF-09-012	2X-Large

PROFLEX® 710 TRADES GLOVES

Full-fingered trades gloves: superb dexterity, function, and protection for the skilled professional

- Visco-elastic gel polymer to damper shock and impact
- Abrasion resistant, textured PVC on palm and fingers
- Breathable, 3-layer stretch Spandex with neoprene knuckle pad •
- Synthetic leather palm and fingers
- Terry thumb brow wipe

16153

16154

16155

16156

- · Flex zones for added comfort
- Reinforced fingertips for
- opti
- Full Cas

SAI229

SAI230

SAI231

SAI232

 Full-fing Case Q 	WORK CEAL		
Order	Mfg.		
No.	No.	Size	
SAI228	16152	Small	



SED998



Thermal Gloves - Cold

HI-VIZ THERMAL WATERPROOF GLOVES

- 40-g 3M[™] Thinsulate[™] insulation
- Hipora breathable waterproof and windproof liner
- 3M[™] Scotchlite[™] reflective zones on back and wrist
- · Abrasion-resistant textured PVC on palm and fingers
- Durable synthetic leather palm and fingers PVC-reinforced thumb/index finger saddle
- Padded knuckle for added protection
- Breathable neoprene cuff with hook and loop closure
- Reinforced fingertips
- Machine washable
- Case Qty: 6
- Sold per pair

Applications: Lifting, packing, shipping and traffic directing

Order	Mfg.		
No.	No.	Size	
SAP871	16412	Small	***TENACIOUS
SAP872	16413	Medium	<u> </u>
SAP873	16414	Large	ergodyne
SAP874	16415	X-Large	WORK GEAN .
SAP875	16416	2X-Large	

HYD-TUF[®] 52-590 GLOVES

- Medium to heavy-duty A.C.P. impregnated winter gloves
- · Outperforms standard cotton and leather gloves
- · Snug and comfortable fit
- · Nitrile coating resists snags,
- punctures, abrasions and cuts Excellent dry grip and repels
- oil, grease and grime
- Safety cuff Accepted for use in Canadian
- food processing facilities
- Case Oty: 72
- Sold per pair

Applications:

Operating machinery and equipment, shipping and receiving, maintenance



SQUIDS[®] GRABBERS™

- · Easy to use with a comfortable feel
- Keeps gloves close at hand
- Clips to clothing, belts, tool belts and D-rings
- Breakaway feature
- Dielectric/non-conductive material



Order No.	Mfg. No.	Colour	Order No.	Mfg. No.	Colour
GRABBERS	тм		GRABBERS	™ W/BELT	CLIP
SAO180	19112	Black	SAO184	19122	Black
SAO181	19117	Blue	SAO185	19127	Blue
SAO182	19118	Orange	SAO186	19128	Orange
SAO183	19119	Yellow	SAO187	19129	Yellow

INSULATOR® 78-101/78-150 GLOVES

- · Hand warmer in cold, damp working environments • May be used as an under glove
- Ambidextrous
- Case Qtv: 144
- Sold per pair

Applications: Handling chilled or refrigerated products, fishing industry, utilities, construction, general maintenance



Order No.	Colour	Size	
SEA277	Blue	One Size	
SEA308	White	One Size	

WINTER MONKEY GRIP® 23-193 GLOVES

- PVC coated foam insulated
- · Tough PVC coating stays soft when cold
- Keep hands warm and dry
- Protect from abrasion
- · Curved fingers, wing thumb, and soft jersey lining make them very comfortable
- · Fully coated
- · Safety cuff
- Accepted for use in Canadian food processing facilities
- Case Oty: 72
- Sold per pair

Applications: Cold storage, winter transportation, yard and field work, unheated warehouses, construction

Order No.	Description	Size	
SBA993	Safety Cuff	10	
SBA992	Knit Wrist	10	
SEE953	Raised Finish, Safety Cuff	10	-

HAND WARMERS

- · Perfect for people who work in the cold for long hours
- · Air-activated and will provide up to 10 hours of heat (130°F)
- Environmentally friendly,
- contains all natural ingredients Non-toxic, non-flammable
- Sold per pair

HOTHANDS



Ansell

Order No. Mfg. No. Description **SAR429** HH-26 Hand Warmers





Thermal Gloves - Heat

HOT MILL GLOVES

- Top quality heavy cotton fabric construction
- Heavy cotton-lined palm provides superior heat resistance
- SAO167 32-oz. lined palm for increased heat protection
- 4" gauntlet cuff provides extra protection
- Case Qty: 144
- Sold per pair

Applications: Forging, foundries,

plastic extrusions and other operations that require heat protection



Order No.	Description	Size
SEF067	24-oz. Yellow Palm	X-Large
SEF068	32-oz. Green Palm	X-Large

ALUMINIZED GLOVES

- Designed with a combination of heat-resistant palm and an aluminized back to deflect heat
- · Fully aluminized style
- For extreme situations where temperatures are higher and molten splash and flame is present
- 14" overall length
- Sold per pair

Order

SAP573

SAP574

SAP575

No.

~

Description	
Aluminized Back	
Aluminized Back,	One-Finger Mitt
Fully Aluminized	
Fully Aluminized,	Mitt
	Aluminized Back Aluminized Back, Fully Aluminized

WOOL-LINED KEVLAR® SEAMLESS GLOVES

- 100% Kevlar[®] outer shell
- with seamless wool liner
- Flame resistant and self-extinguishing
- Cut resistant
- Excellent dexterity
- Protects up to 700°F (371°C)
- Colour: Yellow
- Case Qty: 12
- Sold per pair

Applications: Foundries, castings and steel mill work



Order	Mfg.		
No.	No.	Size	
SQ154	1863	Large	

HOT MILL TOP QUALITY GLOVES

- Exceptional comfort, insulation and superior heat protection
- 24-oz., gauntlet cuff
- Provides protection up to 400°F (204°C)
- · Colour: White
- Case Qty: 120
- Sold per pair

Applications: Tire manufacturing, plastic extrusions, heat treating and metal industries





Order No.	Mfg. No.	Size	
SAI321	436G	Large	



SA509



SA507

ZENTH® Safety Products

RESPIRATORS

EYEWEAR Starting on

page 108

CLOTHING

Starting on page 167

GLOVES

Starting on page 190

TRAFFIC SAFETY

Starting on page 284

SPILL CONTROL MANAGEMENT Starting on

page 24

Safety Products for Industry

Foot Protection

VBAFFIN

FCHNDLDGY

SAL023



WHITE PVC STEEL TOE BOOTS

- Designed for use where mild chemical resistance is required
- Designed to help processing plants
- comply with HACCP guidelines
- Injected molded seamless construction Steel toe style complies with ASTM F2413-05
- Safety-Lok outsole

Order

SC573

SC574

SC575

SC576

SC577

SC578

SC579

SC580

No.

· Reinforced steel shank for added safety and comfort

Size

6

7

8

q

10

11

12

13

- Replaceable cushion insoles
- · Cut-off bands for height adjustment
- · Pull-up and kick-off lugs for easy on and off



Mfg.

81012-6

81012-7

81012-8

81012-9

81012-10

81012-11

81012-12

81012-13

No.



SC573

BULLY

- Acid and oil-resistant Ultraflex[™] compound
- Generous wider fit
- Self-cleaning outsole
- · GelFlex fatigue resistant mid sole • Slip resistant first impact
- heel strike design
- Also available in white
- Certified to CSA standard Z195

RECOMMENDED APPLICATIONS:

2ª	Á	*	71	THE	
Agriculture	Chemicals	Construction	Food Processing	Petrochemical	

Agriculture	Chemicals Construction	Food Processing	Petrochemical	
Order No.	Mfg. No.	Size	Order No.	Mfg. No.
STEEL TO	DE		STEEL TO	E/STEEL PLATE
SAL013	9677-587-7	7	SAL020	9679-587-7
SAL014	9677-587-8	8	SAL021	9679-587-8
SAL015	9677-587-9	9	SAL022	9679-587-9
SAL016	9677-587-10	10	SAL023	9679-587-10
SAL017	9677-587-11	11	SAL024	9679-587-11
SAL018	9677-587-12	12	SAL025	9679-587-12

13



Other sizes available

9677-587-13

SAL019

TOE GUARDS Resistant 15-gauge carbon

- steel construction for maximum toe protection
- 75-lb, impact rating Adjustable straps permit
- adjustability and optimal fit
- 4.5" W
- Weight: 14 oz. per pair

Shoe not included

ZEN/TH[®]

• One size fits all

Order No. SEE903

FOOT GUARDS


- · Lightweight and resistant plastic construction
- 30-lb. impact rating
- · Rubber straps on heel and sole permit adjustability

METATARSAL **GUARDS**

- · Lightweight and resistant steel construction
- Designed to fit on work boot laces
- adjustability and optimal fit

Boot not included

· Spring fasteners permit and optimal fit • 4.5" W Weight: 8 oz. per pair • Weight: 12 oz. per pair • One size fits all Colour: Green Order No. SEE904 · One size fits all Order No. SEE902 ZENTH Shoe not included



Foot Protection

PVC OVERSHOES/BOOTS

- Four-Way cleated outsole
- Heavy Flex-O-Thane PVC construction for added durability
- Premium overshoe and overboot protection
- Excellent cold weather flexibility
- Self-cleaning, slip resistance outsole
- · Kick off lug for easy on and off
- Fits over most work shoes and boots

Applications: Construction, farming, utilities and food processing.



4" Overs	shoe	10" Ove	rboot	17" Ove	rboot	
Order	Mfg.	Order	Mfg.	Order	Mfg.	
No.	No.	No.	No.	No.	No.	Size
SED420	86010-XS	SED424	86020-XS	SED422	86030-XS	X-Small
SAP584	86010-S	SAS322	86020-S	SAO188	86030-S	Small
SAP585	86010-M	SAS323	86020-M	SAO189	86030-M	Medium
SAP586	86010-L	SAS324	86020-L	SAO190	86030-L	Large
SAP587	86010-XL	SAS325	86020-XL	SAO191	86030-XL	X-Large
SED421	86010-X2L	SED425	86020-2XL	SED423	86030-2XL	2X-Large

16" ECONOMY BOOTS

- Excellent underfoot protection
- Designed to provide exceptional puncture resistance
- · Injected molded seamless construction
- Full steel midsole
- Replaceable cushion insoles
- Pull-ups and kick off lug for easy on and off
- · Cut off band for height adjustment · Excellent for use in orchards, construction, vegetables fields, citrus groves, and agriculture
- · Steel toe complies with
- ASTM F2413-05 and CSA Z195
- CSA Green Patch (sole protection and Grade 1 protective toe)

Order	Mfg.	
No.	No.	Size
SAJ689	86622-6	6
SAJ690	86622-7	7
SAJ691	86622-8	8
SAJ692	86622-9	9
SAJ693	86622-10	10
SAJ694	86622-11	11
SAJ695	86622-12	12
SAJ696	86622-13	13

EXPLORER OVERSHOES

- Extremely lightweight and
- offer durable long lasting overshoes • Provide warmth to feet, are 100%
- waterproof and windproof
- Very quick and snug fit adjustment Nylon upper fabric, Superlite outsole
- For temperatures up to -20° F (-28.9° C)

Order	Mfg.		Fits
No.	No.	Size	Size
SED280	EXPGBLKXSM	X-Small	3-4.5
SED281	EXPGBLKSML	Small	5-6.5
SED282	EXPGBLKMED	Medium	7-8.5
SED283	EXPGBLKLRG	Large	9-10.5
SED284	EXPGBLK1XL	X-Large	11-12.5
SED285	EXPGBLK2XL	2X-Large	13-14.5
SED286	EXPGBLK3XL	3X-Large	14-16.5





HUNTER

- · Lightweight and flexible TR compound
- -40°C/-40°F felt inner boot system
- Longwearing self-cleaning outsole
- 1" snow cuff
- Certified to CSA standard Z195
- ESR/EH rated



RECOMMENDED

	AHONS	•		
2	8	*	71	直
Agriculture	Cold Weather	Construction	Food Processing	Utilitie



Order No.	Mfg. No.	Size	Order No.	Mfg. No.	Size
STEEL TO		5120		E / STEEL PLATE	3120
	6				
SAK998	8563-394-7	7	SAL006	8564-033-7	7
SAK999	8563-394-8	8	SAL007	8564-033-8	8
SAL001	8563-394-9	9	SAL008	8564-033-9	9
SAL002	8563-394-10	10	SAL009	8564-033-10	10
SAL003	8563-394-11	11	SAL010	8564-033-11	11
SAL004	8563-394-12	12	SAL011	8564-033-12	12
SAL005	8563-394-13	13	SAL012	8564-033-13	13

Other sizes available

TURBOTOE SAFETY TOE CAPS

- 100% waterproof, will not harden, stiff or crack • Perfect for visitors, casual or temporary workers,
- management, clerical staff and sales people
- Can be comfortably worn over low-heel, dress and running shoes, and most boots
- Ideal for many working environment that carry a risk of toe damage, or has a steel toe cap requirement
- Certified to CSA standard Z195-09-Protective Footwear Grade 1 protection



IMPACTO[®] Protective Products Inc.

Order No.	Mfg. No.	Size	Fits Size	Colour
SED175	TTXS	X-Small	4-5	Grey
SED176	TTS	Small	6-7	White
SED177	TTM	Medium	8-9	Yellow
SED178	TTL	Large	10-11	Red
SED179	TTXL	X-Large	12-13	Blue

13-14

ANTI-SLIP SNOW SHOES • Special non-split studs offer excellent traction on ice and snow • Non-slip flexible snow shoes

2X-Large

- Includes 10 durable spikes

TTXXL

- · Made from thermoplastic elastomer
- Flexible up to -40°C

Order No. SEA004 Medium, fits shoe size 5-8

Order No. SEA005

SED180

Large, fits shoe size 8-11 Order No. SEA006 X-Large, fits shoe size 11-13



Green

Boot not included





ONGUARD



SAO188

SAJ689

THE ABC'S OF FALL PROTECTION

A typical Person Fall Arrest System (PFAS) incorporates three components, often described as the ABC's of fall protection. The anchorage connector, body support, and connecting device, when used together, form a complete system for maximum worker protection. But don't forget about another required component of any fall protection program – descent, rescue, and retrieval of a fallen worker.





Anchorages are a secure point of attachment. They must be able to hold fast under more than a ton of force generated in a fall.



Body support harnesses distribute fall forces over the upper thighs, pelvis, chest, and shoulders. They provide a connection point on the worker for the PFAS.




Connectors such as shock absorbing lanyards or self retracting lifelines connect a workers harness to the anchorage.



Descent and rescue devices are used to retrieve an injured worker or lower him to the ground.

FULL BODY HARNESS APPLICATIONS

CSA STANDARD Z259.10-06 DIVIDES HARNESSES IN TO 5 CLASSES:

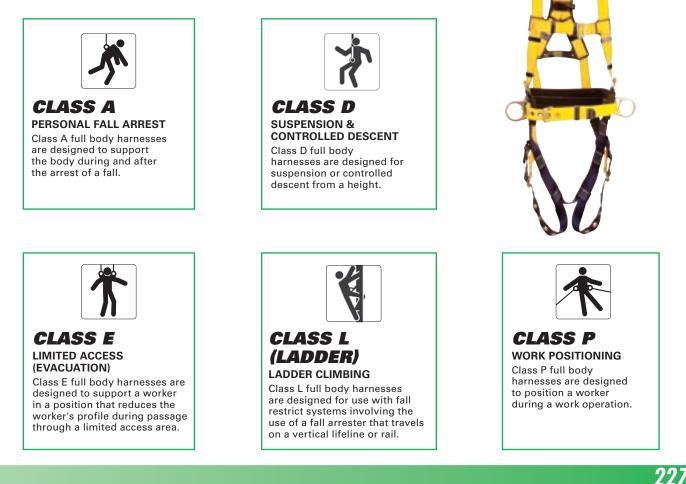

EXOFIT™ NEX HARNESSES

- Soft, lightweight, water repellent webbing reduces attraction of mold and dirt, and has up to 5 times more abrasion resistance
- Spring-loaded stand-up dorsal D-ring with impact indicator
 Comfortable design does without taggling
- Comfortable design dons without tangling
 Due LakTM guick connect buckles provide a
- Duo-Lok[™] quick-connect buckles provide one-handed operation
 Revolver[™] vertical torso adjusters
- eliminate loose ends and lock into place
- Tech-Lite[™] aluminum D-Rings
- Lightweight, moisture wicking, breathable hybrid comfort padding won't move or slip
 Soft edging moves with you, preventing
- Soft edging moves with you, preve uncomfortable rubbing or chafing
- Molded lanyard keepers prevent dangerous entanglements
- Shoulder caps provide protection and comfort when carrying heavy materials
- Reflective piping enhances visibility
 in low-light conditions
- Built-in carrying pocket conveniently protects a cell phone, camera, or other items
- Integrated trauma straps help minimize suspension trauma post fall
- i-Safe™ enabled providing the ability to track inspections, control inventory, and manage information
- Certified to CSA standard Z259.10-06



Order No.	Mfg. No.	D-Rings	Hip Pad and Body Belt	Size	CSA Class
SEB598	1113001C	Back	No	Small	A
SEB599	1113004C	Back	No	Medium	A
SEB600	1113007C	Back	No	Large	А
SEB601	1113010C	Back	No	X-Large	А
SEB592	1113121C	Back and Sid	e Yes	Small	Α, Ρ
SEB593	1113124C	Back and Sid	e Yes	Medium	А, Р
SEB594	1113127C	Back and Sid	e Yes	Large	Α, Ρ
SEB596	1113130C	Back and Sid	e Yes	X-Large	А, Р

EXOFIT™ FULL BODY HARNESSES

- Constructed from abrasion-resistant anti-tear ballistic nylon
- Comfortable design dons without tangling
 Outlink connect buckles provide
- Quick-connect buckles provide one-handed operation
- Complete 5-point adjustment with easy-grip end tabs
- Built-in shoulder, leg, and hip padding
- Breathable lining guarantees you'll stay dry and comfortable
- Soft edging moves with you, preventing uncomfortable rubbing or chafing
- Reflective piping enhances visibility in low-light conditions
- in iow-light condi • i-Safe™ enabled

228

Certified to CSA standard Z259.10-06



Order No.	Mfg. No.	D-Rings	Size	CSA Class
SEB393	1107975C	Back	Small	А
SEB394	1107976C	Back	Medium	А
SEB395	1107977C	Back	Large	А
SEB396	1107981C	Back	X-Large	А
SEB410	1108600C	Back, Front and Side	Small	A, D, L, P
SEB411	1108601C	Back, Front and Side	Medium	A, D, L, P
SEB412	1108602C	Back, Front and Side	Large	A, D, L, P
SEB413	1108606C	Back, Front and Side	X-Large	A, D, L, P

EXOFIT™ XP HARNESSES

- Soft, lightweight webbing is strong, but not stiff or coarse
- Spring-loaded stand-up dorsal D-ring with impact indicator
- Comfortable design dons without tangling
- Quick-connect buckles provide one-handed operation
- Complete 5-point adjustment with easy-grip end tabs
- Removable padding is easily cleaned in the washing machine
- Breathable 3D mesh lining
- Soft edging moves with you, preventing uncomfortable rubbing or chafing
- Integrated lanyard keepers prevent dangerous entanglements
- Reflective piping enhances visibility in low-light conditions
- i-Safe[™] enabled
- Certified to CSA standard Z259.10-06



Order No.	Mfg. No.	D-Rings	Size	CSA Class
SEB414	1110100C	Back	Small	А
SEB415	1110101C	Back	Medium	A
SEB416	1110102C	Back	Large	А
SEB417	1110103C	Back	X-Large	Α

DELTA™ HARNESSES

- Patented triangular no-tangle design creates a frame that allows the harness to fall into place when donned
- Repel[™] webbing is water repellent to reduce the attraction of mold and dirt, and has more abrasion resistance
- Revolver[™] vertical torso adjusters eliminate loose ends and lock into place
- Lanyard keepers hold your unused snap hooks and help reduce trip hazards
- Spring-loaded stand-up dorsal D-ring
 Impact indicators provide a visual alert that
- Impact indicators provide a visual alert that the harness has been involved in a fall
 Vest style harnesses are the most universal
- Vest style namesses are the most universal
 Construction style harnesses have excellent tool-carrying capability, a sewn in hip pad, and a removable body belt
- Cross-over style harnesses have a frontmounted D-ring, making them ideal for ladder climbing and rescue applications
- Certified to CSA standard Z259.10-06





					-
Order No.	Mfg. No.	D-Rings	Leg Connections	Size	CSA Class
VEST					
SEB391	1110600C	Back	Quick-Connect	Universal	А
SEB406	1102000C	Back	Tongue Buckle	Universal	A
SEB403	1103321C	Back	Pass-Thru	Universal	A
SEB401	1102008C	Back and Side	Tongue Buckle	Universal	Α, Ρ
SEB392	1110602C	Back and Shoulder	Quick-Connect	Universal	Α, Ε
SEB409	1101254C	Back and Shoulder	Tongue Buckle	Universal	Α, Ε
CONSTRU	UCTION				
SEB397	1102201C	Back and Side	Tongue Buckle	Small	Α, Ρ
SEB398	1101654C	Back and Side	Tongue Buckle	Medium	Α, Ρ
SEB399	1101655C	Back and Side	Tongue Buckle	Large	Α, Ρ
SEB400	1101656C	Back and Side	Tongue Buckle	X-Large	Α, Ρ
SEB418	1102526C	Back	Tongue Buckle	Universal	A
CROSS-O	VER				
SEB402	1102010C	Back and Front	Pass-thru	Universal	A, D, L
SEB405	1103270C I	Back, Front and Si	de Pass-Thru	Universal	A, D, L, P





PRO™ HARNESSES

- Harness design provides greater comfort and added safety
- High quality alloy steel dorsal D-ring is adjustable for worker convenience
- Spring-loaded torso buckles provide fast and easy adjustment on the job
- Lightweight hardware reduces fatigue and increases comfort and productivity
- Lanyard keepers provide a place to "park" a lanyard when not in use, to prevent accidental entanglements
- Built-in impact indicators allow for easy inspection
- Certified to CSA standard Z259.10-06



ety SEB360		SEB369	
	SEB30	56	-

Order No.	Mfg. No.	Style	D-Rings	Leg Connections	Additional Features	Size*	CSA Class
SEB363	1191201C	Vest - Standard	Back	Pass-Thru	-	Medium/Large	А
SEB366	1191237C	Vest - Standard	Back	Tongue Buckle	-	Medium/Large	А
SEB369	1191253C	Vest - Standard	Back	Quick-Connect	Back, Shoulder, and Leg Padding	Medium/Large	А
SEB360	1191209C	Construction	Back and Side	Tongue Buckle	Hip Pad and Belt	Medium/Large	Α, Ρ
SEC036	1191257C	Retrieval	Back and Shoulder	Quick-Connect	Back, Shoulder, and Leg Padding	Medium/Large	Α, Ε

*Small and X-Large sizes are also available

FIRST™ HARNESSES

- Fundamental fall protection with exceptional value
- One adjustable dorsal D-Ring
- Supple back plaque
- 1.75" wide polyester web for durability
- Zinc-plated stamped steel hardware
- Pass-thru leg and chest closures
- Universal size



PRO™ WELDERS HARNESSES

- Heat and flame resistant webbing made from modacrylic over Kevlar and polyester
- High durability and resistance to abrasion
- Alloy steel connectors and D-rings
 Specifically designed for welding
- applications to provide char resistanceLightweight design to improve comfort
- Ughtweight design to improve connort
 Web and lanyard storage keepers
- reduce potential entanglement hazards • Char temperature: 700°F
- 420-lb. user weight capacity (including tools and equipment)
- Pass-thru chest connectors
- Certified to CSA standard Z259.10-06
- Size: Medium/Large*

Order No.	Mfg. No.	D-Rings	Leg Connections	CSA Class
SEJ400	1191379C	Back	Pass-Thru	А
SEJ403	1191381C	Back and Side	Pass-Thru	Α, Ρ
SEJ406	1191389C	Back, Side and Shoulder	Pass-Thru	A, P, E
SEJ409	1191383C	Back	Tongue Buckle	А
SEJ412	1191385C	Back and Side	Tongue Buckle	Α, Ρ
SEJ415	1191392C	Back, Side and Shoulder	Tongue Buckle	A, P, E
× 0 11	1.57.1			

*Small and X-Large available on request

SUSPENSION TRAUMA SAFETY STRAPS

- They are deployed when needed, hook together in seconds, and let a suspended worker stand up in harness, relieving downward pressure
- You can quickly attach them to most harness brands right in the field
 Compact lightweight design
- Compact, lightweight design stays out of your way

Order No. SEB436 Mfg. No. 9501403C





229

MILLER[®] AIRCORE[™] HARNESSES

- Designed with breathable, open-core padding technology that provides optimal air flow, while reducing heat and moisture entrapment, keeping a worker drier and cooler
- Patented Miller DuraFlex® stretchable webbing provides greater flexibility and increased comfort
- Easy adjustment with cam buckles on shoulder straps
- · Contoured ergonomic padding design minimizes contact around a worker's neck,
- lower back, and inner thighs to reduce chaffing and irritation
- Stand-up back D-ring
- Quick-connect chest strap buckles for easy donning
- · Lightweight materials and components reduce fatigue for all-day endurance and increased productivity
- Durable knitted mesh back shield minimizes moisture absorption and maintains optimal air circulation
- Certified to CSA standard Z259.10-06

Order No.	Mfg. No.	D-Rings	Leg Connections	Additional Features	CSA Class
STEEL H	ARDWARE	0			
SEJ642	AC-TB/UGN	Back	Tongue Buckle	-	А
SEJ643	AC-TB-D/UGN	Back and Side	Tongue Buckle	-	Α, Ρ
SEJ644	AC-TB-BDP/UGN	Back and Side	Tongue Buckle	Lumbar Pad and Removable Belt	Α, Ρ
SEJ645	AC-QC/UGN	Back	Quick Connect	-	А
SEJ646	AC-QC-D/UGN	Back and Side	Quick Connect	-	Α, Ρ
SEJ647	AC-QC-BDP/UGN	Back and Side	Quick Connect	Lumbar Pad and Removable Belt	: A, P
ALUMIN	UM HARDWARE				
SEJ648	ACA-TB/UGN	Back	Tongue Buckle	-	А
SEJ649	ACA-TB-D/UGN	Back and Side	Tongue Buckle	-	Α, Ρ
SEJ650	ACA-TB-BDP/UGN	Back and Side	Tongue Buckle	Lumbar Pad and Removable Belt	Α, Ρ
SEJ651	ACA-QC/UGN	Back	Quick Connect	-	А
SEJ652	ACA-QC-D/UGN	Back and Side	Quick Connect	-	Α, Ρ
SEJ653	ACA-QC-BDP/UGN	Back and Side	Quick Connect	Lumbar Pad and Removable Belt	: A, P





MILLER

SP

SEJ644

MILLER[®] REVOLUTION[™] HARNESSES

- Donning made easy with two-sided, Dualtech[™] webbing with contrasting colours and textures
- Easy, one-hand cam buckle adjustment/release allows simultaneous adjustment of shoulder straps
- Clip-on design safely organises webbing after proper adjustment
- ErgoArmor[™] semi-flexible back shield minimises impact from sharp/heavy snap hooks and self-retracting lifelines
- PivotLink[™] hip connections unique rotary design provides greater comfort in bending/mobility
- Integrated pack encapsulates labels minimising damage and loss
- Integrated accessory system wih modular attachment design provides connection points for belts/tools/accessories
- Rated to 400 lbs. (181.4kg) capacity
- Certified to CSA standard Z259.10-06 •

Order No.	Mfg No.	D-Rings	Leg Connections	Removable Belt	CSA Class	— 💽 _{san}
SAN124	RDT-QC/UBKC	Back	Quick-Connect	No	А	
SAN125	RDT-TB/UBKC	Back	Tongue Buckle	No	А	MILLER
SAN126	RDT-QC-B/UBKC	Back	Quick-Connect	Yes	А	
SAN127	RDT-TB-B/UBKC	Back	Tongue Buckle	Yes	А	by Honeywell
SAN128	RDT-QC-DP/UBKC	Back, Side	Quick-Connect	No	Α, Ρ	
SAN129	RDT-TB-DP/UBKC	Back, Side	Tongue Buckle	No	Α, Ρ	MILLER
SAN130	RDT-QC-BDP/UBKC	Back, Side	Quick-Connect	Yes	Α, Ρ	REVOLUTION
SAN131	RDT-TB-BDP/UBKC	Back, Side	Tongue Buckle	Yes	Α, Ρ	

MILLER[®] REVOLUTION[™] HARNESS ACCESSORIES

Order No.	Mfg. No.	Description
ACCESSO	RIES	
SAN133	RIA-T2	Cell Phone/Jobsite Radio Holder w/Snap-On Connector
SAN134	RIA-T3	Water Bottle Holder, 1 Qt.
SAN135	RIA-T4	Open Bolt and Bull Pin Bag w/Quick Release Tool Snap
SAN137	RIA-T6	2-Pocket Nail and Tool Pouch
SAN138	RIA-T7	Large Multi Pouch Tool Bag w/2 Steel Hammer Loops
OPTIONA	L PADDING	
SAN142	RIA-P1	Shoulder/Leg Pads (2/pack)
SAN143	RIA-P2	Seat Pad
BELTS (FI	TS SIZES 32"	TO 54")
SAN146	RIA-B1	Belt w/PivotLinkTM Attachments, 5-Accessory Connectors
SAN147	RIA-B2	Padded belt w/PivotLinkTM Attachments, 5-Accessory Connectors

Note: Inquire about individual accessories.



SAN137

SAN124

SAN134

by Honeywell

SAN138



SAK308

MILLER® ULTRA HARNESSES

- The new line of Ultra Harnesses is designed with patented DuraFlex® stretchable webbing that provides greater comfort, increases productivity and improves safety
- In addition, the DuraFlex[®] Python[™] Ultra Harness also features cushioned tubular webbing in the shoulder straps to minimize possible discomfort around the neck and shoulders when required to wear a tool belt
- Comfort-touch back D-ring pad is designed with woven, breathable material for greater comfort; orients harness for quick tangle-free donning
- · Sleek, quick-connect buckles for chest and leg straps for easy donning and feature a dual-tab release mechanism to prevent accidental opening
- Friction shoulder strap buckles stay firmly in place Universal fit
- · Certified to C

Order

No.

MILLER by Honeywell

Additional

Features

SAK309

MILLER

by Honeywel

MILLER

by Honeywel

o CSA standard Z259.10-06						
Mfg. No.	D. Bingo	CSA				
INO.	D-Rings	Class				

DURAFLE	(° ULTRA HARNESSE	S					
SAK309	E650QC/UGN	Back	А	-			
SAK310	E650-7QC/UGN	Back and Side	Α, Ρ	-			
SAK311	E650-77QC/UGN	Back and Side	Α, Ρ	Body Belt			
DURAFLEX° PYTHON™ ULTRA HARNESSES							
SAK142	P950QC/UGN	Back	А				
SAK307	P950-7QC/UGN	Back and Side	Α, Ρ				
SAK308	P950-77QC/UGN	Back and Side	Α, Ρ	Body Belt			

HP™ HIGH PERFORMANCE HARNESSES

- Durable, lightweight nylon webbing
- Bright colours make the HP[™] harnesses readily visible and easy to inspect
- · Back strap prevents user from falling out of the harness
- · Lanyard ring allows user to attach lanyard when not in use
- All harnesses include sub pelvic strap
- Universal fit (available in other sizes upon request)
- Available in blue polyester webbing for greater chemical resistance
- Colour: Lime green
- Certified to CSA standard Z259.10-06

Order No.	Mfg. No.	D-Rings	Shoulder Connections	Leg Connections	Chest Connections	CSA Class	Special Feature
SAP484	650T/UGK	Back	Friction	Mating	Mating	А	Belt Loops
SAP485	650T4/UGK	Back	Friction	Tongue Buckle	e Mating	Α	Belt Loops
SAP486	650T7/UGK	Back and Side	Friction	Mating	Mating	Α, Ρ	Belt Loops
SAP488	650T76/UGK	Back and Side	Friction	Tongue Buckle	e Mating	Α, Ρ	Belt Loops, 6" CoolMax Back Pad/Tool Belt and CoolMax Shoulder Pads
SAP490	552T/UGK B	ack, Front, and Sid	e Mating	Mating	-	A, L, P	-
SAP491	552T4/UGK B	ack, Front, and Sid	e Mating	Tongue Buckle	; -	A, L, P	-
SAP492	850T/UGK	Back	Friction	Mating	Mating	Α	-

NON-STRETCH HARNESSES

- Non-stretch nylon webbing is lightweight and durable
- · Bright yellow colour makes it visible and easy to inspect
- · Fall indicator/warning flag indicates that the harness has
- been involved in a fall and should be removed from service
- Back strap prevents user from falling out of the harness
- · Lanyard ring allows user to attach lanyard when not in use
- Most harnesses include sub pelvic strap
- Universal fit unless specified (other sizes available upon request)
- · Also available in polyester webbing for greater chemical resistance
- · Colour: Yellow
- Certified to CSA standard Z259.10-06

Order No.	Mfg. No.	D-Rings	Shoulder Connections	Leg Connections	Chest Connections	CSA Class	Special Feature
SC965	650/UYK	Back	Friction	Mating	Mating	А	Belt Loops
SC967	650-3/UYK	Back and Shoulder	Friction	Mating	Mating	Α, Ε	Belt Loops
SC961	650-4/UYK	Back	Friction	Tongue Buckle	Mating	А	Belt Loops
SC962	650FD4/UYK	Back and Front	Friction	Tongue Buckle	Mating	A, D, L	Belt Loops
SC963	650-64/UYK	Back and Shoulder	Friction	Tongue Buckle	Mating	Α, Ε	Belt Loops
SC964	650FD64/UYK	Back, Front, and Shoulde	er Friction	Tongue Buckle	Mating	A, D, E, L, F	Belt Loops
SC977	552/UYK	Back and Front	Mating	Mating		A, D, L	-
SC969	751S/M	Back	-	Mating	Mating	A	Small/Medium
SC970	751L/X	Back	-	Mating	Mating	А	Large/X-Large





DURAFLEX® STRETCHABLE HARNESSES

- · Allows greater freedom of movement and offer improved comfort and overall safety
- · Synthetic elastomer webbing stretches with the worker for maximum comfort
- · Fall indicator/warning flag indicates that the harness has
- been involved in a fall and should be removed from service
- · Back strap prevents user from falling out of the harness • Injection-molded Santoprene® D-ring back pad is soft and flexible, enhancing comfort
- Pull-free lanyard ring allows user to attach lanyard when not in use
- · Labelling includes inspection tag and space for personal identification
- · Belt loops to accommodate belts, back pads and other accessories
- Universal fit (other sizes available upon request)
- Colour: Lime green
 Certified to CSA standard 7259.10-06



- Certin								
Order No.	Mfg. No.	D-Rings	Shoulder Connections	Leg Connections	Chest Connections	CSA Class		
SC978	E552/UGN	Back, Front & Side	Mating	Mating	-	A, L, P		
SC973	E650/UGN	Back	Friction	Mating	Mating	A		
SC975	E650-4/UGN	l Back	Friction	Tongue Buckle	Mating	A		

DURAFLEX[®] PYTHON[™] HARNESSES

- Shoulder straps are constructed of soft, cushioned tubular webbing
- Lower torso straps are constructed of specially-formulated DuraFlex® stretchable webbing
- Leg straps are constructed of lightweight, non-stretch webbing
- Injection-molded Santoprene[®] D-ring back pad is soft and flexible, enhancing comfort
- Pull-free lanyard ring allows user to attach lanyard when not in use
- Belt loops to accommodate belts, back pads and other accessories
- Universal fit (other sizes available upon request)
- Colour: Lime green



AILLER

MILLER

by Honeywell

SP.

by Honeywell

 Certified to CSA standard Z259.10-06 					by Honeywell	
Order No.	Mfg. No.	D-Ring	Shoulder Connections	Leg Connections	Chest Connections	CSA Class
SAH525	P950/UGN	Back	Friction	Mating	Mating	А
SAH526	P950-4/UGN	Back	Friction	Tongue Buckle	Mating	А
SAH527	P950-7/UGN	Back and Side	Friction	Mating	Mating	Α, Ρ
SAH528	P950-58/UGN	Back and Side	Friction	Tongue Buckle	Mating	Α, Ρ

TITAN™ CONTRACTOR'S HARNESSES

- · Full-body harnesses made from lightweight durable
- polyester webbing for all-day comfort and dependability
- Fully adjustable design
- Sliding back D-ring
- Sub-pelvic strap
- Universal fit (other sizes available upon request)
- Colour: Orange
- Certified to CSA standard 7259.10-06

Order No.	Mfg. No.	D-Rings	Shoulder Connections	Leg Connections	Chest Connections	CSA Class
SN064	T4000/UAK	Back	Mating	Mating	Mating	А
SN065	T4007/UAK	Back & Side	Mating	Mating	Mating	Α, Ρ
SN066	T4500/UAK	Back	Mating	Tongue Buckle	Mating	Á
SN067	T4507/UAK	Back & Side	Mating	Tongue Buckle	Mating	Α, Ρ

T-FLEX TITAN™ STRETCHABLE HARNESSES

- Durable, stretch polyester webbing construction
- for improved comfort and greater mobility
- Fully adjustable design for maximum comfort
- · Non-slip chest strap assures proper fit
- · Sub-pelvic strap for added safety and support • Mating shoulder and chest strap buckles stay firmly in place
- · Pull-free lanyard rings for added convenience · Sliding back D-ring and pad ensure correct back D-ring position
- Universal fit
- Certified to CSA standard Z259.10-06

Order	Mfg.		Chest	CSA
No.	No.	D-Rings	Connections	Class
SAK297	TF4000/UAK	Back	Mating	A*
SAK298	TF4500/UAK	Back	Tongue Buckle	A*
SAK299	TF4007/UAK	Back and Side	Mating	A,P*
SAK300	TF4507/UAK	Back and Side	Tongue Buckle	A,P*

* CSA Class D and L when optional front D-Ring is added









WELDER'S HARNESSES

- Blue, flame-retardant Nomex[®] webbing to protect against weld splatter
- The special inner Kevlar[®] core adds strength and high-temperature resistance
- Features one back D-ring, friction shoulder straps and mating leg and chest connections
- Contrasting webbing colours make inspection easier
- Rated to 400-lb (181.4 kg) capacity when using a SofStop[®] shock absorber
 Includes unique, durable Lexan[®] labeling
- with inspection grid for easy tracking
- Universal fit (other sizes available upon request)
- Certified to CSA standard Z259.10-06

Order No. SAK325 Mfg. No. 850K/UBL MILLER By Honeywell



MILLER[®] REVOLUTION[™] ARC-RATED HARNESSES

Designed to protect workers from falls caused by electric arc-flash and arc-blast exposure when working at heights or in confined space applications near energized electrical sources.

- Features the same key elements as the Miller[®] Revolution Harness (see page 230)
 Kevlar[®]/Nomex[®] Miller[®] DualTech[™] webbing patent-pending 10000 lb. tensile
- strength webbing is engineered with permanent fire retardant (FR) properties.
 Webbing offers the durability and FR properties of Kevlar[®] on the outer side,
- with softer FR Nomex® on the inside of the webbing for greater comfort
- Webbing assures arc protection and durability that eclipses any nylon webbing
 PivotLink[™] design allows unmatched freedom of motion and comfort,
- while the unique cam buckles provide easy two-finger adjustment • Leather insulators under all metal hardware offer additional protection for the worker
- Leather insulators under all metal hardware offer additional protection for the Keyler[®] web leap on the back and ellows for a "metal leap" connection
- Kevlar[®] web loop on the back pad allows for a "metal-less" connection when used with a Kevlar[®] shock absorbing lanvard with a choice off loop
- when used with a Kevlar[®] shock-absorbing lanyard with a choke-off loop ● All Miller[®] Revolution[™] arc-rated harnesses have bright red binding
- on every pad, making them easily identifiable as an arc-rated product • Meets stringent ASTM F887-05 arc-flash standards
- Certified to CSA standard Z259.10-06





			by Honeyweii
Order No.	Mfg No.	Leg Connections	CSA Class
SAR473	RKNAR-QC/UBK	Quick-Connect	А
SAR474	RKNAR-TB/UBK	Tongue Buckle	A

Note: Other styles available upon request



RITE-ON™ HARNESSES

Designed with two things in mind: Simplicity and Comfort. It's constructed to shape around the user with ease. The harnesses are engineered with a lumbar support to make the donning of a harness a breeze. The comfort pad also eliminates the tangling of the straps which are common with traditional harnesses.

The bayonet style connectors allow users to connect their chest and legs straps in a single action.

RITE-ON™ HARNESSES

- Integrated back and shoulder pad Conforms to the wearers' shape to provide all-day comfort
- Fast-action bayonet style connectors Allow quick and easy donning
- Extended D-ring option Makes lanyard connection easier and safer
- Sweat wicking pad fabric Keeps wearers comfortable in hot conditions
- Tangle-free pad design Harness keeps its shape between use, aiding quick and easy donning
- · Lightweight polyester webbing Offers superior UV and chemical resistance
- Universal size with full adjustability One size fits most
- Certified to CSA standard Z259.10-06

Order	Mfg.		CSA	
No.	No.	D-Rings	Class	
SAK490	FP81F/1DBA	Back	А	
SAO631	FP81F/1EDBA	Extended-back	А	
SAO632	FP81F/3DDA	Back and Side	Α, Ρ	
SAO633	FP81F/3EDDA	Extended-back and Side	A, P	
SAO634	FP81F/4DLA	Back, Side and Front	A, P, L	
SAO635	FP81F/4EDLA	Extended-back, Side and Front	A, P, L	

RITE-ON™ II HARNESSES

- Designed for more simplicity and comfort, this series is
- constructed to shape around the user with ease
- Open cell foam padding wicks sweat away from the body, keeping
- workers cool and dry throughout the day, and improving productivity • Integral back and shoulder pad eliminates tangling of the harness's straps
- Integral back and shoulder pad eminiation
 Lumbar pad decreases back injuries
- Removable 11" comfort leg pad reduces of pinch point and strain while in work position
- Quick-connect buckles allow easy, single action secure connection
- Protective label pouch makes identification and inspection easier
- Fall arrest indicator makes it easier for a worker to identify if a large load has been applied to the harness
- Certified to CSA standard Z259.10-06







C

SAK490

SEA289

Order	Mfg.				CSA
No.	No.	D-Rings	Belted	Size	Class
SEA288	FP81T/1DBASM	Back	No	Small/Medium	А
SEA287	FP81T/1DBALXL	Back	No	Large/X-Large	А
SEA290	FP81T/1EDBASM	Extended-back	No	Small/Medium	A
SEA289	FP81T/1EDBALXL	Extended-back	No	Large/X-Large	А
SEA296	FP81V/6D3ASM Ba	ack, Front, Side and Shoulder	Yes	Small/Medium	A, P, L, E
SEA295	FP81V/6D3ALXL Ba	ack, Front, Side and Shoulder	Yes	Large/X-Large	A, P, L, E
SEA298	FP81V/6ED3ASM	Extended-Back,	Yes	Small/Medium	A, P, L, E
		Front, Side and Shoulder			
SEA297	FP81V/6ED3ALXL	Extended-Back,	Yes	Large/X-Large	A, P, L, E
		Front, Side and Shoulder		- 0	

VEST-STYLE UNIVERSAL HARNESSES

- · Adjustable shoulder straps and chest strap can be positioned in the
- optimum location for the user, eliminating the need for stretchable webbing
- Proven polyester webbing provides added UV
- protection and chemical resistance
- Sub-pelvic strap adds comfort and helps
- distribute the forces generated in a fall
- Universal fit (X-Large available upon request)
- Certified to CSA standard Z259.10-06

~	•
	NORTH
	by Honeywe

Order No.	Mfg. No.	D-Rings	Leg Connections	CSA Class	Special Feature
SN128	FP759/1DP	Back	Quick-Connect	А	-
SN129	FP759/1DGP	Back	Tongue Buckle	А	-
SAK493	FP769/3DGPUL	Back and Side	Tongue Buckle	Α, Ρ	Lumbar Support and Tool Belt



234

TREND-X CROSS-CHEST HARNESSES

- · Lightweight, slip-on convenience and form fitting comfort
- No chest strap means comfort and mobility are enhanced
- while allowing access to breast pockets
- D-Stop strap in the back helps keep you in the harness in case of a fall · Polyester webbing

D-Rings

Back

Back and Front

Back, Front and Side

Universal sizing

Mfg.

No.

FP721/1DP

FP722/2DP

FP722/4DP

Order

SAH757

SA0543

SAO562

No.

Certified to CSA standard Z259.10-06



CSA

Class

А

A, D, L

A, P, D, L



VEST-STYLE	HARNESSES

- Lightweight comfort and durability
- · Tough nylon webbing and forged hardware for long-term wear and safety
- Sub-pelvic strap to help evenly distribute the forces generated in a fall •
- Pass-thru leg and chest straps
- Certified to CSA standard Z259.10-06

	by Honeywell			
Order No.	Mfg. No.	D-Rings	Size	CSA Class
SAJ266	FP700/1DS	Back	Small	А
SN088	FP700/1DM	Back	Medium	А
SN089	FP700/1DL	Back	Large	А
SN090	FP700/1DXL	Back	X-Large	A
SAJ268	FP700/1EDS	Extended-Back	Small	А
SN091	FP700/1EDM	Extended-Back	Medium	А
SN092	FP700/1EDL	Extended-Back	Large	А
SN093	FP700/1EDXL	Extended-Back	X-Large	А

Leg

Connections

Quick-Connect

Ouick-Connect

Quick-Connect

HIGH-VISIBILITY VEST HARNESSES

- Class 2 traffic vest with integral harness combines high visibility with fall protection in one, easy-to-wear garment
- Leg strap pocket When not in use as a harness, the leg straps can be conveniently tucked into a pocket in the rear of the vest and then quickly released when needed
- Certified to CSA standard Z259.10-06

Mfg.

No.

Order

SAK510

SAK511

SAK512

No.



Class

A, P

Α, Ρ

A, P





HEAVY-DUTY HARNESSES

FP700/3DTV84M

FP700/3DTV84XL

FP700/3DTV84L

- Rated for 440 lbs. Exceeds the requirements of CSA and ANSI to provide reliable fall protection for workers above the CSA/ANSI limit of 310 lbs. (total weight of person plus tools and equipment)
- Back and side D-rings with 2" polyester webbing, extra wide for strength and wearer comfort
- · Features an integrated back and shoulder pad which conforms to the wearer's shape to provide all-day comfort
- Integrated 440-Ib rated, Soft-Pak lanyard Permanently attached lanyard ensures that both lanyard and harness are correctly rated to 440 lbs.
- Tongue and buckle leg straps Provide faster and easier donning and adjustment
- Universal size with full adjustability One size fits most
- Certified to CSA standard Z259.10-06



Size

Medium

Large

X-Large

			by Honeywell
Order	Mfg.		CSA
No.	No.	D-Rings	Class
SAO636	FP80K/3DYQ320	Extended-Back and Side	A, P

D-Rings

Back and Side

Back and Side

Back and Side



DURABILT HARNESSES

- · Basic lightweight universal harness for everyday use
- User friendly, cost effective
- Polyester webbing for greater resistance to chemicals
- Universal style, one size fits most
- ISO 9001 manufacturing facility
- Certified to CSA standard Z259.10-06

Order No.	Mfg. No.	D-Rings	Leg Connections	Size	CSA Class
SAH533	FPD698/1DP	Back	Pass-thru	Universal	А
SAH535	FPD698/1DPXL	Back	Pass-thru	XL	А
SAH534	FPD698/1DGP	Back	Tongue Buckle	Universal	A
SAH536	FPD698/1DGPXL	Back	Tongue Buckle	XL	A
SAH762	FPD698/3DGP	Back and Side	Tongue Buckle	Universal	Α, Ρ
SAH764	FPD698/3DGPXL	Backand Side	Tongue Buckle	XL	Α, Ρ
ACCESSORIES					
Order	Mfg.				

Order No.	Mfg. No.	Description
SAR472	FB780L	Leg or Shoulder Pad w/Velcro Enclosure

TITAN™ AERIAL LIFT FALL PROTECTION KITS

- Full-body Titan[™] construction harness with permanently
- attached 6' (1.8 m) tubular shock-absorbing lanyard • Universal fit
- Oniversal In
 Harness certified to CSA standard Z259.10-06, Class A
- Lanyard certified to CSA standard Z259.10-06, Class A
 Lanyard certified to CSA standard Z259.11-05, Class E4



NORTH

by Honeywell

Order	Mfg.	Lanyard	Carrying
No.	No.	Anchorage Connection	Bag
SAH515	TK4051/U/6FTAKC	Locking Snap Hook	No
SAH517	TK4052/U/6FTAKC	Locking Rebar Hook	No

TITAN™ CONSTRUCTION & GENERAL MAINTENANCE FALL PROTECTION KITS

- One full body universal sized harness with tongue buckle leg straps (SN066)
- One 6' (1.8 m) tubular shock-absorbing lanyard (SN069)
- One 6' (1.8 m) cross arm strap
- Harness certified to CSA standard Z259.10-06, Class A
- Lanyard certified to CSA standard Z259.11-05, Class E4

Order No. SR532

integral

Mfg. No. TCK4500/U16FTAKC





SAH533





SAH515

 Fully adjustable, non-stretch harness
 Certified to CSA standard Z259.10-06, Class A
 5/8" (16 mm) diameter polyester/ polypropylene construction with loop and

LIGHTWEIGHT, FULL-BODY HARNESS HIGH-STRENGTH ROPE LIFELINE

- construction with loop and locking snap hook • 9300-lb tensile strength, treated
 - 9300-Ib tensile strength, treated to combat ultraviolet rays

VERSATILE, REUSABLE ROOF ANCHOR WITH ATTACHMENT D-RING

- Easily installs on steep-pitched or flat surface roofs
- Reusable roof anchor

WATER-PROOF CONTAINER

• Ideal for equipment storage



• Durable, corrosion-resistant, stainless steel construction

COMPACT TRAILING ROPE GRAB

• Lightweight, easy-to-use design with hands-free operation

Attaches anywhere on the lifeline

SHOCK-ABSORBING LANYARD

shock absorber and two

• Certified to CSA standard Z259.11-05, Class E4

locking snap hooks

• 3' ft (0.9 m) polyester web lanyard with

Order	Mfg.	
No.	No.	Description
SAK303	BRFK25/25FTC	25' (7.6 m) Rope Lifeline
SAK304	BRFK50/50FTC	50' (15 m) Rope Lifeline




NORTH

HARNESS/LANYARD KITS

- Harness with permanently attached 4' or 6' decelerator energy absorbing lanyard
- Harness certified to CSA standard Z259.10-06, Class A,P
- Lanyard certified to CSA standard Z259.11-05, Class E4

Order No.	Mfg. No.	Anchorage Connection	Lanyard Length'	Harness Size
SAH769	FPDCOMBO1/4	Double Locking Snap Hook	4	Universal
SAH771	FPDCOMBO1/6	Double Locking Snap Hook	6	Universal
SAH772	FPDCOMB01XL/6	Double Locking Snap Hook	6	X-Large
SAH540	FPDCOMBO2/4	Double Locking Rebar Hook	4	Universal
SAH542	FPDCOMBO2/6	Double Locking Rebar Hook	6	Universal
SAH543	FPDCOMBO2XL/6	Double Locking Rebar Hook	6	X-Large





AERIAL FALL PROTECTION KITS

- Polyester full body harness
- · Permanently attached polyester decelerator energy
- absorbing lanyard with double locking snap hook
- Carrying bag included
- Harness certified to CSA standard Z259.10-06, Class A
 Lanyard certified to CSA standard Z259.11-05, Class E4



NORT



			by Honeywell
Order No.	Mfg No.	Lanyard Length'	Harness Size
SAH777	FPDKIT1/4	4	Universal
SAH778	FPDKIT1XL/4	4	X-Large
SAH779	FPDKIT1/6	6	Universal
SAH780	FPDKIT1XL/6	6	X-Large

CONSTRUCTION FALL PROTECTION KITS

- Polyester full body universal harness
- Polyester decelerator energy absorbing lanyard with double locking snap hook

- Carrying bag included
 Harness certified to CSA standard Z259.10-06, Class A • Lanyard certified to CSA standard Z259.11-05, Class E4

			by Honeywell
Order No.	Mfg No.	Lanyard Length'	
SAH794	FPDKIT2/4	4	
SAH797	FPDKIT2/6	6	



SCAFFOLDING/FORMING FALL PROTECTION KITS

- Polyester full body universal harness
- Polyester decelerator energy absorbing lanyard with double locking snap hook and 2 1/2" stamped scaffolding hook
- · Carrying bag included
- · Harness certified to CSA
- standard Z259.10-06, Class A Lanyard certified to CSA
- standard Z259.11-05, Class E4



Order	Mfg	Lanyard	Harness
No.	No.	Length'	Size
SAJ339	FPDKIT3/4	4	Universal
SAJ340	FPDKIT3XL/4	4	X-Large
SAJ341	FPDKIT3/6	6	Universal
SAJ342	FPDKIT3XL/6	6	X-Large

COMPLIANCE IN A CAN™ FALL PROTECTION KITS

- A complete CSA compliant fall protection
- system in one handy container
- Harnesses are certified to CSA standard Z259.10-06, Class A • Lanyards are certified to CSA standard Z259.11-05, Class E4



Order No.	Mfg. No.	Kit Contains
SEB356	2199825	Vest style harness with pass-thru connections
360300	2199625	Reusable Roof Anchor 50', 5/8" polyester/polypropylene lifeline 2' shock absorbing lanyard
SEB357	2199820	Vest style harness with pass-thru connections
	6	shock absorbing lanyard with 2 locking snap hooks

ROOFER'S FALL PROTECTION KITS


- Lightweight universal harness
- Soft pack energy absorbing lanyard and rope grab, permanently attached
- Three-strand copolymer 5/8" (16 mm) rope
- One roof bracket
- One carabiner connector
- Ten 4" (100 mm) Ardox spiral nails
- Durabilt storage bucket
- Harness certified to CSA standard Z259.10-06, Class A
- · Lanyard certified to CSA



Order	Mfg	Rope	
No.	No.	Length'	
SAJ347	FPD90/25	25	
SAJ348	FPD90/50	50	



238

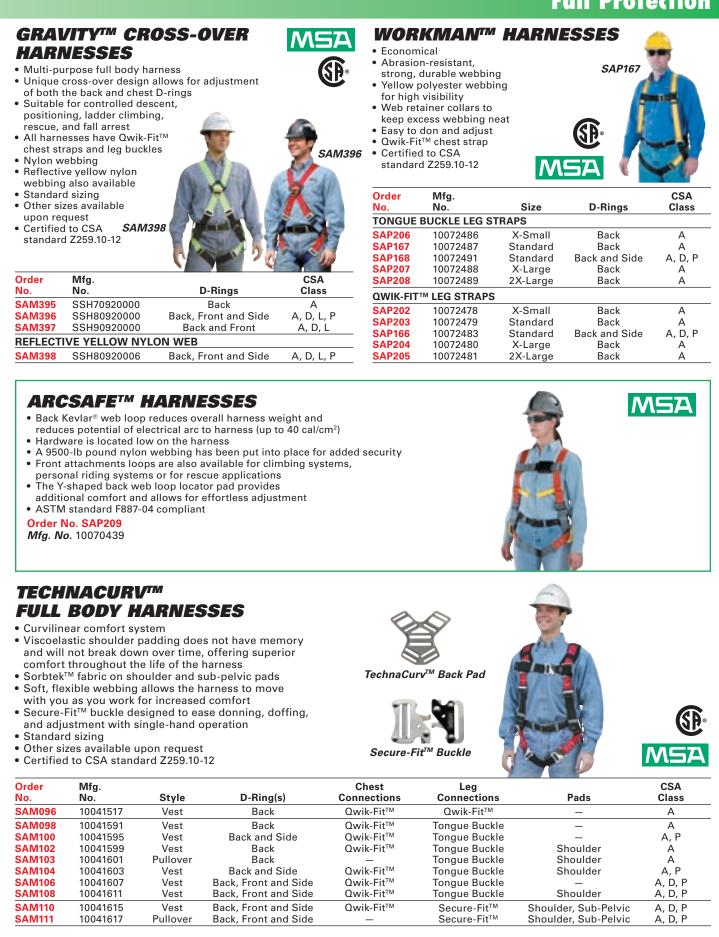

GRAVITY™ TOWER HARNESSES

- Designed for the telecommunication and tower industries
- Universal harness made of black nylon webbing
 with saddle for increased harness comfort
- Cross-chest design
- Padded shoulders and belt with integral tool loops
- Suitable for fall arrest, rescue, controlled
- descent, work positioning and ladder climbing • Back, front and side D-rings
- Back, from and side D-ring
 Pass-thru leg connections
- Certified to CSA standard Z259.10-12



Order No.	Mfg. No.	Belt Waist"	CSA Class
SAM380	SSH91725C001	36-44	A, D, P
SAM381	SSH91725D001	40-48	A, D, P



- Incorporates a sit harness design which allows the user
- a much higher degree of comfort while in the sit position
- Suitable for rappelling/controlled descent, work positioning, ladder climbing, rescue and fall arrest
- Cross-chest design
- Standard 1 3/4" (45 mm) all black polyester webbing
- Back, front and side D-rings
- Mating leg connections
- Certified to CSA standard Z259.10-12



Order	Mfg.	Description	CSA
No.	No.		Class
SAM382	SSH60930001	Integral Belt	A, D, L, P





GRAVITY™ VEST STYLE HARNESSES

 Back D-ring ensures the user is in an upright position, eliminating the need for shoulder D-rings and a spreader bar for confined space applications

Mfa

- Available in nylon or polyester
- Qwik-Fit[™] leg buckles and chest straps
- Standard sizing
- Other sizes available upon request
- Certified to CSA standard Z259.10-12





Ulder	iviig.		UJA
No.	No.	Webbing	Class
SAM391	SSH30420060	Nylon	A
SAM392	SSH30430064	Polyester	Α
-			

<u>2</u>40

Ordor

EZ-STOP SHOCK ABSORBING LANYARDS

- · Features the lightest, smallest, and strongest shock absorber in the world; 66% smaller and 40% lighter than previous EZ-stop models
- · Lightest and strongest rebar hooks on the market
- Thinnest-ever webbing using HI-10[™] Vectran[®] energy
- management material for reduced weight and bulk Vectran[®] is a multifilament high tenacity performance yearn spun
- from liquid crystal polymer that is five times stronger than steel • Repel[™] webbing repels water to reduce
- the attraction of mold and dirt
- High abrasion resistance
- · Excellent chemical and cut resistance
- High impact resistance
- · High visibility accents keep you safe in low-light conditions
- Protected labels for durability and longevity
- Rugged and durable soft shock absorber cover is designed to last Certified to CSA standard Z259.11-05, Class E4 ٠



Order No.	Mfg. No.	Length'	No. of Legs	Harness Connection	Anchorage Connections
SEJ418	12460120	3	One	Snap Hook	Snap Hook
SEJ419	12460170	2 4	One	Snap Hook	Snap Hook
SEJ420	12460110	6	One	Snap Hook	Snap Hook
SEJ421	12461020	6	One	Snap Hook	Rebar Hook
SEJ422	12460220	C 6	Two	Snap Hook	Snap Hooks
SEJ423	12460240	C 6	Two	Snap Hook	Rebar Hooks
SEJ424	12461950	6	Two, Elastic	Snap Hook	Rebar Hooks
SEJ480*	12461930	C 6	Two, Elastic	Snap Hook	Rebar Hooks

*Made with lightweight aluminum snap and rebar hooks

SHOCKWAVE™ 2 LANYARDS

- Tubular core style lanyards uniquely designed to expand and contract in reaction to a workers movements
- Stays out of your way when not in use, avoiding trips and snags
- · Built in impact indicator provides visual evidence
- if the lanyard has been involved in a fall · Length: 6'
- Certified to CSA standard
- Z259.11-05, Class E4



Order No.	Mfg. No.	No. of Legs	Harness Connection	Anchorage Connections	
SEB868	1244306C	One	Snap Hook	Snap Hook	
SEB869	1242450C	Two	Snap Hook	Snap Hooks	

FIRST™ SHOCK ABSORBING LANYARDS

- 1.75" polyester web
- Zinc-plated stamped steel hardware
- Clear cover enables easy inspection of stitching
- Minimum tensile strength is greater than 5000 lbs.
- Length: 6'
- Certified to CSA standard 7259.11-05. Class F4

capital	TA	500	e de la compañía de	0
Order	Mfg.	No. of	Harness	Anchorage

Order	Mfg.	No. of	Harness	Anchorage	
No.	No.	Legs	Connection	Connections	
SEB377	AE57620C	Two	Snap Hook	Steel Rebar Hooks	_

PRO™ PACK SHOCK ABSORBING LANYARDS

SEB872 · Pack-type shock absorber limits fall arrest forces to 900 lbs. for added safety Durable 1" polyester web construction Durable alloy steel, zinc-plated hardware Certified to CSA standard Z259.11-05, Class E4 **SEB873** capita Order Mfg. No. of Harness Anchorage No. No. Lenath' Leas Connection Connections

			3-		
SEB871	1341004C	4	One	Snap Hook	Snap Hook
SEB872	1341001C	6	One	Snap Hook	Snap Hook
SEB384	1340125C	6	One	Snap Hook	Gate Hook
SEB385	1340180C	6	Two	Snap Hook	Gate Hook

PRO-STOP™ SHOCK ABSORBING LANYARDS

- Tubular web shock absorber limits fall arrest forces to 900 lbs. for added safety
- Durable 1" polyester web construction
- · Durable alloy steel, zinc-plated hardwar
- Certified to CSA standard Z259.11-05, Class E4



Order

SEB874

SEB875

No.

Mfg. No.	Length'	No. of Legs	Harness Anchorage ConnectionConnections
1340221C	4	One	Snap Hook Snap Hook
1340240C	6	Two	Snap HookSnap Hooks

SEB875

MILLER® MANYARD® SHOCK-ABSORBING LANYARDS

- Unsurpassed in the market for safety, comfort and mobility
- Special woven shock-absorbing inner core reduces fall arrest forces
- · Heavy-duty tubular outer jacket serves as a back-up web lanyard
- Unique warning flag provides visual proof that a lanyard has been involved in a fall and should be removed from service
- Locking snap hook harness connection • Certified to CSA standard
- Z259.11-05, Class E4

MILLER



by none;	yweii			
Order No.	Mfg. No.	Length'	No. of Legs	Anchorage Connections
SC980	216WLS-Z7/4FTYLC	4	One	Locking Snap Hook
SEI549	216WLS-Z7/5FTYLC	5	One	Locking Snap Hook
SC982	216WLS-Z7/6FTYLC	6	One	Locking Snap Hook
SC983	216WLS-Z7/8FTYLC	8	One	Locking Snap Hook
SC984	219WRS-Z7/4FTYLC	4	One	Locking Rebar Hook
SC985	219WRS-Z7/5FTYLC	5	One	Locking Rebar Hook
SC986	219WRS-Z7/6FTYLC	6	One	Locking Rebar Hook
SC987	219WR-Z/8C	8	One	Locking Rebar Hook
SAH529	231WRS-Z7/6FTYLC	6	Two	Locking Rebar Hooks

MILLER® POSITIONING & RESTRAINT LANYARDS

- Nylon rope lanyards are recommended for "work positioning" and "restraint" only
- Locking snap hook harness connection
- · Certified to CSA standard Z259.11-05, Class A



SA012

Order No.	Mfg. No.	Length'	Anchorage Connections
SA012	201RLS-2-Z7/4FTWH	4	Locking Snap Hook
SA013	201RLS-2-Z7/6FTWH	6	Locking Snap Hook
SA014	201RLS-2-Z7/8FTWH	8	Locking Snap Hook
SD512	202RRS-2-Z/4FTWH	4	Locking Rebar Hook
SD513	202RRS-2-Z/6FTWH	6	Locking Rebar Hook

TITAN™ TIE-BACK LANYARDS

- Pack-type shock absorber is designed for tie-back use, eliminating the need for a separate anchorage connector
- Special polyester webbing (9800 lbs.) for
- greater abrasion resistance
- Forged sliding D-ring for ease of use
- Pack type shock-absorber that
- keeps fall forces at or below 900 lbs.
- · Locking snap hook harness connection
- Auto-locking carabiner anchorage connectors
- Length: 6'
- Certified to CSA standard Z259.11-05, Class E4



Order	Mfg.	No. of	
No.	No.	legs	
SAK301	T6111TB-Z7/6FTAFC	One	
SAK302	T6121TB-Z7/6FTAFC	Two	

MILLER® MANYARD® II STRETCHABLE SHOCK-ABSORBING LANYARDS

Manyard® II shock-absorbing lanyards offer the same features as the Manyard® lanyards, with additional value-added features:

- Unique stretchable design offers
- greater manoeuvrability and safety Integral bright red core makes visual
- inspection easier and more reliable Locking snap hook
- harness connection

WILLER by Honeywel

 Length: 6' Certified to CSA standard Z259.11-05, Class E4



Order No.	Mfg. No.	Length'	No. of Legs	Anchorage Connections
SAH530	216M-Z7/6FTGNC	6	One	Locking Snap Hook
SAH531	219M-Z7/6FTGNC	6	One	Locking Rebar Hook
SAH532	231M-Z7/6FTGNC	6	Two	Locking Rebar Hooks

MILLER[®] SOFSTOP[®] SHOCK-ABSORBING LANYARDS

- Features the versatile Miller[®] SofStop[®] shock absorber pack
- Specially-woven inner core smoothly
- expands to reduce fall arrest forces Locking snap hook connection
- Certified to CSA standard Z259.11-05, Class E4

MILLER by Honeywel



Order Mfg. No. No. Length' Material 901RS-2-Z/4C SA033 4 5/8" Rope 901RS-2-Z/6C 5/8" Rope SA035 6 SA036 913WS-Z/4C 4 Webbing 913WLS-Z7/5FTYLC Webbing SA037 5 SA038 913WLS-Z7/6FTYLC 6 Webbing

TITAN™ SHOCK-ABSORBING LANYARDS

- Made of lightweight, durable polyester webbing
- Tubular built-in core lanyards feature a built-in woven inner core which smoothly expands to reduce fall arrest forces, while the outer jacket serves as a back-up web lanyard
- Pack-type style includes the shock absorber pack that expands to reduce fall forces while a back-up safety strap deploys
- Length: 6'
- Locking snap hook harness connection
- Certified to CSA standard Z259.11-05, Class E4

by Honeywell

Order No. Mfg. No. No. of Legs Shock-Absorber Type Anchorage Connections SN069 T5111-Z7/6FTAFC One Tubular Built-In Core Locking Snap Hook SN070 T5112-Z7/6FTAFC One Tubular Built-In Core Locking Rebar Hook SN071 T5121-Z/6C Two Tubular Built-In Core Locking Rap Hooks SN072 T5122-Z7/6FTAFC Two Tubular Built-In Core Locking Rebar Hooks SN073 T6111-Z7/6FTAFC Two Tubular Built-In Core Locking Rebar Hooks SN074 T6121-Z/6C Two Pack-Type Locking Snap Hooks SN074 T6121-Z/6C Two Pack-Type Locking Snap Hooks SN075 T6122-Z7/6FTAFC Two Pack-Type Locking Rebar Hooks					
SN070T5112-Z7/6FTAFCOneTubular Built-In CoreLocking Rebar HookSN071T5121-Z/6CTwoTubular Built-In CoreLocking Snap HooksSN072T5122-Z7/6FTAFCTwoTubular Built-In CoreLocking Rebar HooksSN073T6111-Z7/6FTAFCOnePack-TypeLocking Snap HooksSN074T6121-Z/6CTwoPack-TypeLocking Snap Hooks		•			
SN072 T5122-Z7/6FTAFC Tubular Built-In Core Locking Rebar Hooks SN073 T6111-Z7/6FTAFC One Pack-Type Locking Snap Hooks SN074 T6121-Z/6C Two Pack-Type Locking Snap Hooks					
SN074 T6121-Z/6C Two Pack-Type Locking Snap Hooks					
	SN074	T6121-Z/6C	Two	Pack-Type	

SN069



SAK301

6P

MILLER

by Honeywell

BACKBITER® TIE-BACK LANYARDS

- Made with the Miller[®] 5K snap hook (gate load capacity of 5000 lbs.), which is designed especially for wrapping around objects and snapping back onto the lanyard
- Offers a solution to the common, yet unsafe, practice of workers wrapping a regular lanyard around their anchor point
- All models come with the SofStop[®] shock absorber
- Harness connects with a locking snap hook
- Length: 6'
- Certified to CSA standard Z259.11-05, Class E4

SH005

SAR475

Order No.	Mfg. No.	Description	Colour	
SH005 SH007	913B/6FTGNC 913BD/6FTBLC	Nylon Polyester	Green Blue	
-		,		

ARC-RATED SHOCK-ABSORBING LANYARDS

- Arc-rated Kevlar[®] webbing available in both single and double-legged models upon request
- Also available with choke-off loop upon request
- Locking snap hook harness connection
- Length: 6'
- Certified to CSA standard Z259.11-05, Class E4

<u>M</u>ILLER[®]

by Honeywell

Order No.	Mfg. No.	Style	Anchorage Connections
SAR475	216MK-Z7/6FTBKC	Manyard II	Locking Snap Hooks
SAR476	219MK-Z7/6FTBKC	Manyard II	Locking Rebar Hook
SAR477	913K-Z7/6FTBKC	w/SofStop [®]	Locking Snap Hooks
SAR478	913KR-Z7/6FTBKC	Shock Absorber w/SofStop® Shock Absorber	Locking Rebar Hook

DECELERATOR ENERGY-ABSORBING LANYARDS

- Simple design Limits complexity and keeps down cost
- Proven performance Effectively limits maximum
- arrest force to less than 900 lbs.Flagging system Even partial deployment causes a flag to
- become visible, indicating that the lanyard has been subjected to a fall equivalent load and should be withdrawn from service
- Nylon webbing Offers superior resistance to abrasion and alkaline chemicals
- Two-leg lanyards available Provide 100% tie-off
- Snap hook harness connection
- Certified to CSA standard Z259.11-05, Class E4



2) 110110)				
Order No.	Mfg. No.	Length'	No. of Legs	Anchorage Connections
SN107	FP28822/4	4	One	Snap Hook
SN108	FP28822/6	6	One	Snap Hook
SN109	FP28829/4	4	One	Rebar/Ladder Hook
SN110	FP28829/6	6	One	Rebar/Ladder Hook
SN111	FP289299/4	4	Two	Rebar/Ladder Hook
SN112	FP289299/6	6	Two	Rebar/Ladder Hook

WELDER'S SHOCK-ABSORBING

- Blue, flame-retardant Nomex[®] webbing to protect against weld splatter
- The special inner Kevlar[®] core adds strength and high-temperature resistance
- Features Sofstop[®] shock-absorber and two locking snap hooks
- Contrasting webbing colours make inspection easier
- Length: 6'
- Certifified to CSA standard Z259.11-05, Class E4

Order No. SAK326 Mfg. No. 913K-Z76FTBLC



SOFT PAK ENERGY-ABSORBING LANYARDS

- Shock-absorbing design Proven over years of service, the Soft Pak effectively limits maximum arrest force to less than 900 lbs.
- Easily visible deployment The slightest deployment of the Soft Pak is clearly visible, aiding equipment inspection and identification of lanyards that have been subjected to a fall equivalent load and should be withdrawn from service
- Lightweight polyester webbing Offers superior UV and chemical resistance
- Two-leg lanyards available Provide 100% tie-off
- Snap hook harness connection
- Certified to CSA standard Z259.11-05, Class E4





Order No.	Mfg. No.	Length'	No. of Legs	Anchorage Connections
SN113	FP26322/6	6	One	Snap Hook
SAK515	FP2562GG/6	6	Two	Scaffold Hooks

DURABUILT LANYARDS

- Energy absorbing lanyard
- Durable polyester construction
 Variety of constructions and
- configurations availableDouble locking snap hook
- harness connection • Certified to CSA standard Z259.11-05, class E4

NORTH

SN112



by Honeywe				
Order	Mfg.	Length'	No.	Anchorage
No.	No.		of Legs	Connections
CONTINU	OUS WEB			
SAK520	FPD26311/4	4	One	Double Locking Snap Hook
SAK521	FPD26311/6	6	One	Double Locking Snap Hook
DECELER	ATOR			
SAH537	FPD29811/4	4	One	Double Locking Snap Hook
SAH750	FPD29811/6	6	One	Double Locking Snap Hook
SAH761	FPD29819/6	6	One	Double Locking Rebar Hook
SAK524	FPD2981G/4	4	One	Scaffolding Hook
SAK525	FPD2981G/6	6	One	Scaffolding Hook
DOUBLE-	LEG DECELER	ATOR		
SAK526	FPD299111/4	4	Two	Double Locking Snap Hooks
SAK527	FPD299111/6	6	Two	Double Locking Snap Hooks
SAK528	FPD2991GG/4		Two	Scaffolding Hooks
SAK529	FPD2991GG/6		Two	Scaffolding Hooks

FP5K[™] TIE-BACK SHOCK-ABSORBING LANYARDS

- Uses the FP5K[™] carabiner, a new tie-back lanyard connector with a 5000-lb gate strength and a 1" gate opening, as well as a HL2000 snap hook with a 3/4" gate opening
- Available in web or cable version, 6' length
- (6' adjustable length on web version)
- Web version utilizes Monster-Edge[™] webbing
- with increased abrasion resistance
- Utilises the Sure-StopTM shock absorber
 Available in both single and twin-leg configurations
- Locking snap hook harness connection
- Carabiner anchorage connections
- · Certified to CSA standard



SAM459

IMSA

Order	Mfg.	Number	
No.	No.	of Legs	
NYLON WEB			
SAM459	10047084	One	
SAM460	10047085	Two	
CABLE			
SAM461	10047086	One	
SAM462	10047087	Two	

FP DIAMOND™ SHOCK-ABSORBING LANYARDS

- · Available in a single or twin-leg configuration
- · Durable polyester sheath for increased abrasion and UV resistance
- · Locking snap hook harness connection
- · Certified to CSA standard Z259.11-05, Class E4





244



....

Order	IVItg.	Number	Anchorage	
No.	No.	of Legs	Connections	Length'
SAM463	10023932	One	Snap Hook	6
SAM464	10023970	Two	Snap Hooks	6
SAM465	10023971	Two	Rebar Hooks	6
SAM466	10023936	One	Snap Hook	5
SAM467	10023937	Two	Snap Hooks	5

SURE-STOP™ SHOCK-ABSORBING LANYARDS

- · Uses a tear tape design
- 1" nylon webbing
- Available in single or twin-leg configurations
- · Locking snap hook connections • Certified to CSA standard Z259.11-05, Class E4





Order No.	Mfg. No.	Number of Legs	Length'
SAM471	SWL4068704LS	One	4
SAM473	SWL40400206LS	Two	6

WORKMANTM ENERGY-ABSORBING LANYARDS

- · Lightweight with a low-profile body
- · Shock absorber includes a clear, durable protective cover over
- the labels to increase service life and allow for easy inspection
- Choice of single-leg or twin-leg configuration · Choice of adjustable or tie-back configuration
- Certified to CSA standard Z259.11-05, Class E4



Order No.	Mfg. No.	Number of Legs	Special Features	Length'
SAP195	10072472	One	Tie-Back	6
SAP196	10072474	One	Adjustable	6
SAP197	10072475	Two	Adjustable	6

ARCSAFE™ SHOCK-ABSORBING LANYARDS

- Nvlon webbing
- Adjustable in length from 4' to 6'
- · Sewn loop on shock absorber end
- Locking snap hook connections
- SEI-certified to the requirement of the ASTM F887-05 standard for electrical arc flash protection up to 40 cal/cm²

		SAP199	
MSA			
Order	Mfg.	Number	
No.	No.	of Legs	
SAP198	10060139	One	
SAP199	10060140	Two	

SEE928

NANO-LOK EDGE SELF-RETRACTING LIFELINES

- · Specifically designed for foot level tieoff and sharp edge applications
- Uses an innovative combination of lifeline material, energy absorption, and harness connection to reduce forces on both the worker and the sharp edge
- · Backpack design stays tight to the harness
- and evenly disperses the units weight The direct-to harness connection provides 360° of rotation
- and leaves the D-ring open for rescue or other equipment Tough and flexible 3/16" galvanized cable lifeline provides
- maximum range of motion, durability, and cut resistance Durable, lightweight, impact resistant
- thermoplastic housing
- Certified to CSA standard Z259.2.2-98, Type 1 SRL



Order No.	Mfg. No.	No. of Legs	Anchorage Connection
SEJ600	3500217	1	Snap Hook
SEJ601	3500218	1	Swivel Snap Hook
SEJ607	3500251	1	Rebar Hook
SEJ604	3500238	1	Aluminum Carabiner
SEJ608	3500232	2	Snap Hooks
SEJ609	3500233	2	Swivel Snap Hooks
SEJ615	3500250	2	Rebar Hooks
SEJ614	3500221	2	Aluminum Rebar Locking Hooks

SEALED BLOK™ SELF-RETRACTING LIFELINES

- New sealed design keeps the critical working components free of dirt, grease, water and chemicals
- Built-in carrying handle makes transport and anchoring safe and easy, and provides a secondary "dropped objects protection" attachment point
- Large pivoting anchorage handle stays in line with load for added security
- Anti-ratcheting brake stops falls within inches Cast aluminum housing and heavy gauge steel end
- plates resist damage and provide corrosion resistance Self-locking swivel hook with impact
- indicator makes connections easy, and provides a visual means of inspection
- Certified to CSA standard Z259.2.2-98, Type 3 RSRL

Order No. SEB341 Mfg. No. 3400853C



REBELTM WEB SELF-RETRACTING LIFELINES

- Web lifeline
- · Self-locking hooks
- · Great value with superior features
- Compact and lightweight
- Durable aluminum housing
- Swivel carabiner anchorage connection
- SEB349 Certified to CSA standard Z259.2.2-98, Type 1 SRL



Order No.	Mfg. No. L	ength	Harness Connection	Lifeline
SEB349	AD110BC	10	Swivel Snap Hook	Web
SEB350	AD120BC	20	Rebar Hook	Web
SEE717	3590502	33	Swivel Snap Hook	Galvanized Cable
SEE718	3590552	50	Swivel Snap Hook	Galvanized Cable

NANO-LOK™ SELF-RETRACTING LIFELINES

- Automatic guick-activating arrestor stops a falling worker within inches
- 6' retractable lifeline provides continuous fall protection without restrictions
- Extremely compact and lightweight; at just 1.6 lbs. this unit is 15% lighter and 30% smaller than other units in its class
- 420-lb. weight capacity higher capacity for operator and tools
- Integrated shock absorber provides a visual indication of a fall
- Anchorage connectors install to web, leaving dorsal D-ring open for other equipment or rescue
- · Swiveling anchorage loop eliminates lifeline twisting for smoother operation
- Wide variety of configurations provides complete jobsite versatility and flexibility
- Twin-leg configurations replace twin-leg lanyards and provide 100% tie-off continuous fall protection and improved mobility
- Certified to CSA standard Z259.2.2-98, Type 1 SRL



SEB345

capital

Order No.	Mfg. No.	Number of Legs	Harness Connection	Anchorage Connection
SEE926	3101242	1	Cab Mount Stainless Steel Bracket	Steel Swivel Snap Hook
SEE927	3101233	1	Single Leg Connector	Steel Snap Hook
SEE928	3101258	1	Single Leg Connector	Steel Swivel Snap Hook
SEE929	3101230) 1	Single Leg Connector	Aluminum Carabiner
SEE930	3101286	5 2	Twin Leg Connector	Steel Rebar Hooks
SEE931	3101283	2	Twin Leg Connector	Aluminum Rebar Hooks

ULTRA-LOK™ SELF-RETRACTING LIFELINES

- Galvanized wire rope lifeline
- Maximum durability with minimal weight Stainless steel working components
- for corrosion resistance Durable polyurethane housing and aluminum side plates
- Anti-ratcheting, twin disc brake system limits arresting forces to 900 lbs. (4kN) or less
- Swivel snap hook harness connection and steel hook anchorage connection
- Certified to CSA standard Z259.2.2-98, Type 2 SRL

Order	Mfg.		
No.	No.	Length'	
SEB347	3504433C	20	
SEB345	3504430C	30	
SEB348	3504450C	50	

TALON™ WEB SELF-RETRACTING LIFELINE

- 8' (2.4 m) nylon web self-retracting lifeline
- Extremely lightweight design, under 3 lbs. (1.3 kg)
- Direct harness attachment option
- Built-in anchorage connector Greater freedom of movement
- without compromising safety
- Certified to CSA standard Z259.2.2-98, Type 1 SRL

Order No. SEB337 Mfg. No. 3101001C





MINILITE™ FALL LIMITERS

- Lightweight, compact design only 2.5 lbs.
- Corrosion-resistant interior, frame and components
- Visual load indicator
- Quick-activating, high-strength
- stainless steel braking system
- High-impact protective outer cover
- Prominent reflective labeling Snap hook harness connection
- Length: 11
- Certified to CSA standard Z259.2.2-98, Type 1 SRL

MAILLER



Order No.	Mfg. No.	Anchorage Connection
SG987	FL11-3-Z7/11FT	Twist Lock Carabiner
SG988	FL11-Z7/11FT	Not Included
SG989	FL11-1-Z7/11FT	Twist Lock Carabiner

MILLER[®] SCORPION[™] PERSONAL FALL LIMITERS

- Small, lightweight design: 2.9 lbs. (1.3 kg)
- Quick-activating, high-strength stainless steel braking system - arrests free falls within inches
- · Visual load indicator indicates when
- the unit must be removed from service 400-lb. (181.4 kg) capacity models
- available upon request Locking snap hook
- harness collection
- Length: 9

Order

SAK314

No.

Certified to CSA standard Z259.2.2-98, Type 1 SRL



Mfg.

No.

Anchorage Connection PFL-4-Z7/9FT

Carabiner and Swivel Shackle


SAK314

and the

SAK313


BLACK RHINO™ SELF-RETRACTING LIFELINES

- · Ideal for concrete construction, welding, steel erection and warehouse applications
- Quick-activating, high-strength stainless steel braking system
- Variety of integral anchorage connectors available
- · Integral load indicator indicates when the unit must be removed from service
- Extended service life corrosion-resistant
- stainless steel and aluminum components Integral internal shock absorber - consistently reduces
- fall forces to 900 lbs./f (4 kN) or less for greater safety Length: 9'
- Certified to CSA standard Z259.2.2-98, Type 1 SRL





- Extremely compact and lightweight 1.9 lbs. (0.86 kg)
- Engineered webbing for greater abrasion resistance and long service life High-strength, impact-resistant nylon
- housing for maximum durability
- Built-in swivel prevents lifeline from twisting
- Rated for up to a 400 lbs. (181.4 kg) user
- No annual factory recertification required
- Quick-activating, high-strength stainless steel braking system
- Twin-Turbo[™] models feature a G2 connector and 2 legs for 100% tie off
- Certified to CSA standard Z259.2.2-98, Type 1 SRL



SF.J630 MFLC-3-Z7/6FT 6 SEJ631 MFLC-4-Z7/6FT 6 SEJ632 MFLC-12-Z7/6FT 6

G2 Connector G2 Connector G2 Connector

Locking Snap Hooks Locking Rebar Hooks Aluminum Locking **Rebar Hooks**

FALCONTM SELF-RETRACTING LIFELINES Pound for pound the strongest, most durable retractable lifeline available.

- Corrosion-resistant stainless steel and aluminum internal components
- Engineered spring retraction tension designed not to pull or drag on a worker to improve productivity and reduce fatigue
- Dual swivels (unit top and snap hook) to prevent lifeline from twisting
- Improved load indicator on the snap hook identifies when the unit needs to be removed from service
- Maximum Arresting Force: <900 lbs/f (4 kN)
- · Swivel snap hook harness connection and swivel carabiner anchorage connection
- Certified to CSA standard Z259.2.2-98, Type 2 SRL

LIFETIME HOUSING **GUARANTEE*** * When used under typical working conditions



AILLER	()
by Honeywell	U

SAK317

Order No.	Mfg. No.	Length'	
SAK316	MP20G-Z7/20FT	20	
SAK317	MP50G-Z7/50FT	50	



MILLER

by Honeywe

MILLER

Maximum Working Load: 310 lbs. (148 kg)

SAM506

MIGHTYLITE SELF-RETRACTING LIFELINES

Perfect solution for an array of construction, industrial, warehouse, utility, telecommunications, agriculture, mining and confined space applications.

- · Ideal for hard-to-mount locations
- Corrosion-resistant stainless steel and
- aluminum components extend service life · Carabiner and tagline included
- · Locking snap hook harness connection and carabiner anchorage connection
- Lenath: 20'
- Rated to 310 lbs. (140.6 kg) capacity
- Certified to CSA standard Z259.2.2-98, Type 1 SRL



Order	Mfg.		
No.	No.	Lifeline	
SD001	RL20P-Z7/20FT	1" Polyester Webbing	
SD002	RL20G-Z7/20FT	3/16" Galvanised Cable	
SD003	RL20SS-Z7/20FT	3/16" Stainless Steel Cable	

MIGHTEVAC™ SELF-RETRACTING LIFELINES

- Combines the MightyLite self-retracting lifeline series with a quick-activating retrieval mechanism for emergency evacuation
- 20% lighter than competitive models
- · Provides quick and easy rescue with a 4:1 mechanical advantage (average speed of 25 feet per minute)
- Durable, field-tested construction Corrosion-resistant stainless
- steel/aluminum components
- Convenient, heavy-duty carrying handle Galvanised wire rope
- · Locking snap hook harness connection
- 310 lbs. weight capacity
- Certified to CSA standard Z259.2.2-98, Type 3 RSRL



Order	Mfg.		
No.	No.	Length'	
W/O MOUN	ITING BRACKET		
SAH519	MR50G-Z7/50FT	50	
SAH520	MR100G-Z7/100FT	100	
SAH521	MR130G-Z7/130FT	130	
W/MOUNT	ING BRACKET		
SAH522	MR50GB-Z7/50FT	50	
SAH523	MR100GB-Z7/100FT	100	
SAH524	MR130GB-Z7/130FT	130	

NORT

by Honeywe

DURALITE II SELF-RETRACTING LIFELINES

- 20' in length
- · Lightweight alternative to SRL's equipped with heavy metallic housings or internal mechanisms
- · Made with a tough polymer housing
- 3/4" (20 mm) nylon webbing
- · Variety of connectors available
- · Ideal for a vast variety of applications
- Locking snap hook harness connection Length: 20
- · Certified to CSA standard Z259.2.2-98, Type 1 SRL

Order No. SAJ444 Mfg. No. FP1/306W

DYNA-LOCK® SELF-RETRACTING LIFELINES

- · Fast-acting fall arresters that limit free-fall distance, deceleration distance and fall arrest forces while allowing user freedom of movement
- 4.5' per second locking speed
- Built-in shock absorber
- 3 independent braking mechanisms prevent freezing in icy or corrosive conditions
- Certified to CSA standard Z259.2.2-98, Type 2 SRL



Order	Mfg.		
No.	No.	Lifeline	Length'
DYNA-LOC	K [®] SRL WIT	H HL2000 SNAP HOOK	
SAM506	10006470	Galvanized Wire Rope	30
SAM507	10006468	Galvanized Wire Rope	50
SAM508	10006466	Galvanized Wire Rope	70
SAM509	10006464	Galvanized Wire Rope	95
SAM510	10006447	Dyna-Lock [®] Nylon Web	20
	KER™ SRL W OCKING SM	/ITH RL20 IALL SNAP HOOK	
SAM511	10006446	Dyna-Lock [®] Nylon Web	20



FP1/304W 12 3/4" (20mm) Webbing w/Shock Absorber

2

74

SAH522

SAP408

TIE-OFF ADAPTORS · Pass-thru style polyester web tie-off adaptor Mfg. No. Order No. Length' anita **SEB389** 1003000 3 **SEB390** 1003006 **D-RING ANCHORAGE PLATES** Can be bolted or welded to a structure, offering a compact, reliable connection point Two 1/2" diameter attachment holes Cadmium plated steel D-ring 304 stainless steel anchorage plate Plate size: 1/4" x 2" x 4 1/2' capital Order No. SEB449

Mfg. No. 2101630

CONCRETE DETENT ANCHORS

- · Reusable detent pin assembly allows a user to tie-off anywhere a socket is pre-installed with a push of a button
- Lightweight and portable
- · Socket can be installed vertically or overhead into a concrete wall, floor, or ceiling
- Rugged, corrosion resistant stainless steel

Order No. SEJ623 Mfg. No. 2101004



SAFLOK[®] MINING ANCHORS

- Designed to be used with friction rock bolts in a variety of mining applications
- The hybrid swivel anchor is designed to stay in one spot, while the
- bolt anchor offers the flexibility to move from location to location
- Durable, lightweight, and easy to install

SALA	R capital		
Order No.	Mfg. No.	Description	Bolt Width mm
SEJ619	2100153	Bolt Anchor w/Swivel O-Ring	39
SEJ620	2100154	Bolt Anchor w/Swivel O-Ring	47
SEJ621	2100155	Hybrid Swivel Anchor	39
SEJ622	2100156	Hybrid Swivel Anchor	47

FREESTANDING COUNTERWEIGHT ANCHORS

• Freestanding system is easily placed on top of the roof surface to provide tie-off point for one worker

Order No. SEE809 Mfg. No. 7200439

DOOR/WINDOW JAMB ANCHORS

- Fits door or window sizes ranging from 21 1/2" to 51 1/2" in width
- · Non-penetrating design ensures no damage to structure
- Fast and easy installation with built-in adjustment
- knob no tools or drilling are required
- · Lightweight and extremely portable design

Order No. SEJ618 Mfg. No. 2100080





CABLE TIE-OFF ADAPTORS

- 1/4" coated galvanized cable
- Lightweight and extremely durable Stands up to harsh environments
- Snap hook at one end,
- O-ring at the other Length: 6'
- Order No. SEB470

Mfg. No. AJ408CG-6

CONCRETE D-RING ANCHORS Reusable D-ring assembly

Rugged design for harsh environments

Safe "hook-up" indicator notifies

- user of proper installation
- Install into 11/16" or 3/4" holes -
- only standard drill bits needed Order No. SEB438

Mfg. No. 2104560

ROOF ANCHORS

- 5000-lb anchorage point can be reused
- Forged alloy D-ring
- Painted steel construction
- Includes twenty 16D nails for single use

Total weight: 3 lbs. Order No. SEB388

Mfg. No. AJ730A



- Installs in seconds to the beam structure in any orientation
- Final tightening using a builtin adjustment handle
- Fits up to 1 1/2" thick beam flange, 2 1/2" to 12" wide

Order No. SEE808

Mfg. No. 2108406

GLYDER™ 2 SLIDING **BEAM ANCHORS**

- Wear pads eliminate metal-to-metal contact, for smooth operation
- Dual beam grip adjustment prevents twisting and turning
- Extremely light weight at only 3.7 lbs
- User capacity of 420 lbs. • Fits flange 3 1/2" to 14" wide and up to 1 1/4" thick

Order No. SEB435

Mfa. No. 2104700

BEAM TROLLEY ANCHORAGE CONNECTORS

- Installs easily and guickly overhead with no tools necessary at ends or midpoint on beams
- Non-corrosive double-shielded wheel bearings provide smooth and effortless operation
- Trolley guards protect the wheels from damage and keep the beam ahead of the trolley clear of debris
- Provides added maneuverability, improved safety, and increased productivity
- Fits flat or tapered beam flanges 3" to 8" wide, and up to 11/16" thick

Order No. SEJ617 Mfg. No. 2103143







capital

capital

capital

capital



Easy installation

capital

ROLLGLISS™ R500 RESCUE & DESCENT DEVICES

- · Choice of controlled descent rescue, evacuation, or the versatility of assisted rescue with lifting capabilities
- · Fully automatic controlled descent
- feature, at 2-3 ft. per second (0.6-0.9 m) · Ideal for rescue and evacuation from heights up to 1000' (300 m) for one user 310 lbs. or 330' (100 m) for two users totaling 550 lbs.
- Unique bidirectional design allows one end of the lifeline to descend while the other ascends, ready for another rescue

Order No. SEJ616 Mfg. No. 3320100

CABLE LADDER SAFETY SYSTEMS

- The Lad-Saf[™] flexible cable system consists of a top and bottom bracket that act as anchors for a steel cable that runs the length of the climbing area
- A Lad-Saf[™] sleeve connects the worker to the system, automatically follows the user during the climb, and locks on to the cable in the event of a fall
- · Designed for ease of use, economy, and versatility
- Integrated tension indicating bottom brackets
- take the guess work out of installation Galvanized and stainless steel construction stands
- up to harsh environements for added longevity
- Integrated shock absorbing top bracket reduces forces imposed on ladder during a fall
- Intermediate cable guides prevent cable wear against the ladder and permit the climber to bypass without disconnecting
- Complete system includes both top and bottom brackets, cable and cable guides. They do not include a sleeve, carabiner, or harness
- · System is also customizable, call today to learn more



Order No.	Mfg. No.	Length'	DB
SEE810	LADSAF-20	20	
SEE811	LADSAF-30	30	_

capital

ROPE LIFELINES

- 30' lifeline
- 5/8" diameter • Snap hook at one end
- Features additional abrasion and UV resistance, for added durability, longevity, and safety

Order No. SEC130 Mfg. No. 1202754C



capital

ROPE GRABS

- Constructed of high impact resistant steel
- Operates in automatic or manual mode
- Can be used on approved horizontal rope systems
- Can be removed and reattached to rope at any point during traverse
- Designed for use with nylon or polyester rope
- Accommodates 5/8" (16 mm) rope
- Total weight: 1.75 lbs. (0.79 kg) Certified to CSA standard Z259.2.1-98 (R2004)





Order No.	Mfg. No.	Description
SEB385	AC202C	Cobra Rope Grab
SEB386	AC203C-SA2	Cobra Rope Grab with built-in 2' (0.61 m) Shock Absorber and Lanyard
SEB387	AC203C-2SL	Cobra Rope Grab with built-in 2 3/4' Polyester Web Lanyard

ROPE LIFELINES

- 16 mm (5/8") diameter, polyester sheath with polypropylene core
- Tensile strength: 5600 lbs. (2540 kg)
- Zinc plated stamped steel hook



SEB381

capital

Order No.	Mfg. No.	Length'
SEB381	SSR100-50	50
SEB382	SSR100-100	100

ANCHORAGE CONNECTING CARABINERS

- Zinc plated, 5000-lb.anchorage point
- · Easy one-hand operation
- Self-locking
- 3/4" gate opening
- Meets OSHA 1926 and ANSI SZ359 standards

Order No. SEB926

Mfg. No. AJ514A

SAFLOK™

- CARABINERS
- Steel carabiners
- Self locking/closing 3600-lb. gate

Order	Mfg.	Gate	
No.	No.	Opening"	DBI
SEH168	2000117	11/16	
SEE719	2000113	1 3/16	

LAD-SAF™ ROPE GRABS

- Mobile design automatically follows users for hands-free operation
- Detachable design can be attached or removed anywhere along lifeline
- Inertia and cam locking systems for safety and to prevent "panic-grab"
- For use on 5/8" (16 mm) polyester/ polypropylene rope lifeline
- Use with 3' shock absorbing lanyard

Order No. SEB433 Mfg. No. 5000335C





SEH168



SEE719







capital



ANCHORAGE CONNECTORS

Designed as the intermediary for securing a connecting device to an anchorage, careful consideration should be given to selecting a proper anchorage for ultimate safety. The anchorage should be easily accessible, located a safe distance above any lower obstacles and support 5000 lbs. (22 kN) per worker.

REBAR HOOK ANCHORS

- · Facilitates anchoring to scaffolding, pipe or angle iron
- Features a locking rebar hook
- 400-lb. maximum capacity

Order No.	Mfg. No.	Description
SD538	485-Z7/221NYLC	w/Shock Absorber
SD008	480-Z7/19INGN	w/o Shock Absorber

CROSS-ARM STRAPS

- Web cross-arm strap wraps around
 - I-beams and other structures
- Attaches with a 2" D-ring that slips through a 3" D-ring
- · Forms a secure attachment point for lanyards and other connecting devices · Length: 6'
- 400-lb. maximum capacity

		• •	
Order	Mfg.		
No.	No.	Length	Description
SD009	8183/6FTGN	6	w/Shock Absorb
SAR479	8185K/3FTRK	3	Arc-Rated Keyla

5AK480	8185K/6FTBK	6	Arc-Rated Kevlar
040400		0	A Detect Kerden
SAR479	8185K/3FTBK	3	Arc-Rated Kevlar
SD009	8183/6FTGN	6	w/Shock Absorber

D-BOLT PERMANENT ANCHORAGE CONNECTORS

- 1/2" diameter D-bolt anchor
- One-piece unit with lockwasher and nut
- 400-lb. maximum capacity

Order No. SD005

Mfg. No. 415

ANCHORAGE CONNECTORS

A variety of wrap around anchorage connectors and other connectors for beams will suit most applications. All anchorage connectors have a minimum breaking strength of 22 kN (5000 lbs.), unless otherwise stated.

PASS-THROUGH WEB ANCHOR SLINGS

• 2" heavy-duty nylon web

....

 Small D-ring passes through large D-ring to form a loop around the anchorage point



SAK491

Order No.	Mfg. No.	Length'	
SAK491	FP03/4	4	
SN136	FP03/6	6	

CABLE ANCHOR SLINGS

- 1/4" (6.35 mm) galvanized
- steel cable

-

- Swaged eyes at each end

 PVC coated against corrosion 			
Order No.	Mfg. No.	Length'	 SN137
SN137	FP02/3	3	
SN138	FP02/6	6	 U

¥	BEAM	TI



by Honeywell

ROLLEYS

- Steel anchor point that can be attached to horizontal I-beams
- · Adjustable beam trolley slides along with the worker to provide maximum mobility
- 400-lb. maximum capacity

Order	Mfg.	Description	Beam
No.	No.		Width"
SD010	9065/BK	Beam Trolley	3 - 4 1/2
SAK435	9065-1	Adapter Kit for SD010	3 - 8 1/2



BEAM CLAMPS

- Steel anchor point that can be attached to horizontal I-beams, S-beams or W-beams
- Swivel attachment ring prevents twisting of the worker's connecting device
- 400-lb. maximum capacity

Order No.	Mfg. No.	Max Beam Width"
SD006	450	9
SD007	455	12 1/2



(0):41:

by Honeywell

BOLT-ON D-RING ANCHORAGE CONNECTORS

- Gate opening of 4 1/4" (10.8 cm)
- Reduces roll-out possibilities
 - Mounting hardware required

Order No. SAK492

Mfg. No. FP3730

SPECTRA® WEB ANCHOR SLINGS

- Made of revolutionary Spectra[®] webbing for lightweight, small size, and exceptional strength
- 1" web can be used without additional protective materials in concrete forming

Mfg. No.	Length'
FP242/2	2
FP242/3	3
	No. FP242/2














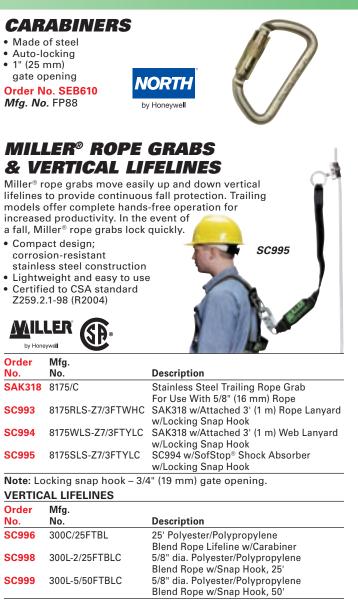

ROPE GRABS & VERTICAL LIFELINES

Rope grab and lifeline combinations still provide some of the most cost-effective solutions for fall protection needs. North offers you the widest assortment of rope implements in the market ranging from automatic rope grabs to rope adjusters.

- · Constructed from quality, corrosion-resistant materials for long service life
- Match the device with the lifeline product that most suits your needs
- Certified to CSA standard Z259.2.1-98 (R2004)

Order	Mfg.				
No.	No.	Description			
AUTOMATIC	ROPE GRAB				
SN114	FP541	Automatic Panic Lock - Rope Grat)		
SAG159	FP542	Automatic Panic Lock with 2' Lan	Automatic Panic Lock with 2' Lanyard, Energy Absorber with Snap Hook		
AUTOMATIC	ROPE GRAB WITH PARE	K FEATURE			
SN117	FP564	Includes 2' (0.6 m) Soft Pak Energ	y Absorbing Lanyard wit	h Snap Hook	
VERTICAL L	IFELINES				
Order	Mfg.			Tensile	
No.	No.	Description	Composition	Strength	
SN118	FP16E/SP50	5/8" (16 mm) 3-Strand, 50'	Polyolefin Fibre	8100 lbs. (3680 kg)	
SN119	FP16E/SP100	5/8" (16 mm) 3-Strand, 100'	Polyolefin Fibre	8100 lbs. (3680 kg)	
SEC448	195R-2/50FTWH	5/8" (16 mm) Kernmantel, 50'	Nylon	12570 lbs. (5700 kg)	
SEC449	195R-2/100FTWH	5/8" (16 mm) Kernmantel, 100'	Nylon	12570 lbs. (5700 kg)	



- Twist-lock gates
- 400-lb. (181.4 kg) maximum capacity.



Order No.	Mfg. No.	Material	Gate Opening"	
	17D-1		date opening	
SAK327		Steel	I	
SAK328	17D-2-Z7/	Aluminum	1	
SAK330	18D-1	Steel	2	
SAK331	18D-2-Z7/	Aluminum	2 1/4	

SN117

LIFTING YOKES & SPREADER BARS

To be used with the harness equipped with shoulder D-rings for confined space rescue
Nylon webbing

Order No. SAR485

Mfg. No. FP4017B

NORT

by Honeywell



CARRYING BAGS

 Convenient carrying bag with North logo

Order No. SAH539 Mfg. No. FPD1011



251

POINTGUARDTM ANCHORAGE STRAPS

- Durable polyester webbing is economical, guick and easy to install • When anchorage connector is no longer
- needed, simply cut strap and throw away • Available in two models:
- Residential construction (3' length) SAM476 - Concrete construction (4' length, includes protective sheath) • 400-lb. (182 kg) capacity

MSA

Order No.	Mfg. No.	Туре	Anchorage Connector	Length'
SAM476	10042792	Residential	D-Ring	3
SAM477	10042793	Residential	Web Loop	3
SAM478	10042794	Concrete	D-Ring	4
SAM479	10042795	Concrete	Web Loop	4

D-PLATE ANCHORAGE **CONNECTORS**

- Provides permanent anchorage point
- Bolts to beams
- or columns



MSA

Order No.	Mfg. No.	Material
SAM483	506632	Zinc-Plated Steel
SAM484	506672	Anodized Aluminum Back-Plate

BOSUN CHAIRS

- · Best method to sit suspended for long durations
- Padded seat ensures comfort during use
- Adjustable web assembly ensures security
- Designed to be used in conjunction with full body harnesses
- Bosun chair, attached to D-ring,
- will keep the user in upright position • 5" x 16 1/2" padded seat, black

nylon straps, 2 carabiners

Order No. SAM399 Mfg. No. SSH3505017





ANCHORAGE STRAPS D-ring on one end and a sewn loop on the other end Length: 5[']

SAM474

MSA			
Order No.	Mfg. No.	Material	
SAM474	505282	Nylon	
SAM475	505298	Polyester	

FP STRYDER BEAM ANCHORS

- Easy, single hand installation
- · Lightweight 4.5 lbs. unit
- Low friction wear pads with Teflon[®] allows the anchor to glide effortlessly along the beam flange
- Integral load indicator alerts the user if the unit has been exposed to a fall
- Versatile design allows for mounting overhead or at worker's feet
- · Easy to use, push-button adjustment with 1/4" adjustment intervals
- Standard version fits beam flange widths from 4" to 14" and the X-Large fits beam flange from 14" to 24"
- 400-lb work capacity

MSA

Order	Mfg.		Fits
No.	No.	Description	Beams"
SAO683	10051961	Standard	4 to 14
SAO684	10051961XL	X-Large	14 to 24

CARABINERS

• 2" (50 mm) gate opening

Auto-locking

Order No. SAM502

Mfg. No. 506308

• 7/8" (22 mm)

 Aluminum Order No. SAM499

gate opening Auto-locking

Mfg. No. 506259

Steel

ALL CARABINERS HAVE A MINIMUM **BREAKING STRENGTH OF 5000 LBS.**

• 1" (25 mm)

Steel

gate opening

Auto-locking

Order No. SAM500

Mfg. No. SRCC643



- 2.1" (52 mm) gate opening Auto-locking
- Steel

Order No. SAM503 Mfg. No. SRCC734G



- 1.2" (32 mm) gate opening Auto-locking
- Steel

Order No. SAM501 Mfg. No. SRCC642



CONFINED SPACE RESCUE SYSTEMS

- DBI Sala has an extensive line of rescue and retrieval systems to suit your confined space entry and rescue needs
- High-quality, rugged systems meet applicable industry
- standards, and can be customized to suit your needs
- Ease-of-use ensures you have the ability to handle a crisis simply, flawlessly, and immediately
- Made from quality materials strong enough to endure
- rough handling and exposure to the elements • Systems are adjustable and adaptable to extreme
- environments and uneven terrain
- Modular design allows you to add to the system over time
 Portable systems are easy to transport, set-up, and store

Maximum Offset Davit Mast


5-Piece System with 42 1/2" Maximum Offset Davit Mast

SEE782

8518040

DON'T SEE ANYTHING THAT SUITS YOUR NEEDS? CALL US TODAY TO BEGIN BUILDING A CUSTOMIZED SOLUTION!



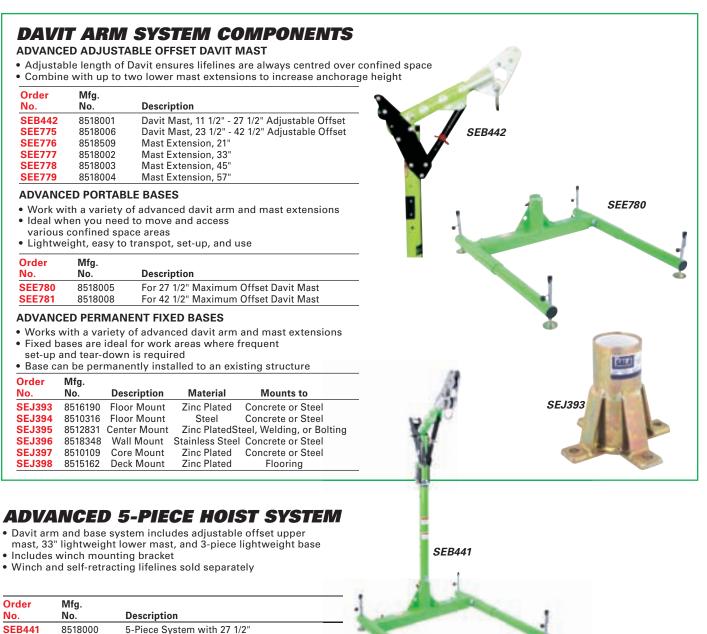

BANTAMLIFT™ DAVIT SYSTEMS

ANCHORAGE CONNECTORS & DAVITS

- Ideal for applications where a temporary anchorage is required
- Assemble and disassemble quickly with the ability to transport from site to site
- · Built tough to provide a safe and secure anchorage for confined space entry, exit, r
- Components are m
- · Rated for working Provide a proof-tes
- (in most configurat when used with ap Booms reach up to
- · Various masts to m
- · Comply with curre
- for confined space

rescue and/or suspension work made of strong aluminum alloy (except for the b Joads up to 450 lbs. (204.5 kg) ested 5000 lbs. (2273 kg) anchor ations) or at least a 2:1 safety factor pproved fall arrest devices to 48" (122 cm) meet your requirements ent OSHA requirements e entry and egress		m alloy (except for the b 4.5 kg) anchor afety factor ces	Dases) SAK565 SAK562	
	Description Davit Fixed Base	Application General Purpose Base	- total	
)	Portable Davit Base	Where Temporary	NORTH	Sold Separately
		Anchorage is Required	NOKIH	Solu Separatery
		Standard Davit Mast	hulleneuuell	
ł	Davit boom 12" to 24'	' Standard Boom	by Honeywell	

INNOVA™ XTIRPA™ CONFINED SPACE RESCUE SYSTEMS

- · Versatile system can be configured to meet many confined space/ rescue applications
- Made of lightweight aluminum composite

Order

SAK562

SAK563

SAK564

SAK565

No.

Mfg.

FP6660/00

FP6663/00

FP6670/24

FP6680/24

No.

- Maximum capacity of 4200 lbs.
- · Ergonomic design allows this system to be easily transported and installed by one person; set-up within five minutes for one person
- Easy storage No vehicle modifications required
- Corrosion resistant, durable system is built to last
- Meets or exceeds applicable CSA, ANSI, **OSHA** and **CSST** requirements Mast

DAVIT ARMS

- Fall protection and retrieval davit arm will facilitate your access to underground chambers and any other confined space
- Equipped with a 5000 lbs. anchor point
- · Capacity is 360 lbs. when used with a mast system, and 420 lbs. when used with a manhole guard: safety factor of 10:1
- Weighs just 23 lbs.
- Meets or exceeds applicable CSA, ANSI, OSHA and CSST requirements



Davit Arm (SAQ158)

(SAQ159)

Base (SAQ161)

MASTS

- · Designed to be used in conjunction with davit arm (SAQ158) and fits all of the permanent or mobile adapters
- Made of aircraft industry aluminum and is very light and durable
- · Weighing only 22 lbs., the unit can be used in confined spaces where a versatile and reliable rescue entry/retrieval system is needed

MANHOLE GUARDS

- Portable barricades have an integrated mast for use with davit arms
- Can be transformed very quickly into a confined space rescue, entry/ retrieval system
 - Meets or exceeds applicable CSA, ANSI, OSHA and **CSST** requirements



SAK564

Mfg.		
No.	Description	
IN2210	Davit Arm	
IN-2003	Mast	
IN-2013	Stainless Steel Wall Base	
IN-2005	Stainless Steel Base	
IN-2001	Manhole Guard	
	No. IN2210 IN-2003 IN-2013 IN-2005	No.DescriptionIN2210Davit ArmIN-2003MastIN-2013Stainless Steel Wall BaseIN-2005Stainless Steel Base

254

ALUMINUM TRIPODS

- · Lightweight and portable
- Ideal for manhole entry and retrieval applications
- · Easily set-up by one worker
- · Adjustable locking legs
- Will span a 5' diameter hole
- Height: 7'

Order No. SEB437 Mfg. No. 8000000



SALALIFT II WINCHES

- Lightweight and easy to use
- Manually operated by simply rotating the handle to raise or lower personnel or materials
- Quick-mount bracket which mates with all DBI Sala® support structures
- · Housing made of durable mediumdensity polyethylene
- Features a self-locking swivel snap hook
- 60' x 1/4" galvanized cable

Order No. SEB445 Mfg. No. 8102001



MILLER® TRIPODS

- · Lightweight, high-strength
- aluminum construction Adjustable legs with integral push
- pins, ideal for uneven surfaces Safety chain and tripod feet with
- rubber skid pads and serrated edge prevent slippage in icy conditions
- Independent leg locking feature holds legs securely in place
- Withstands up to 5000 lbs. (22 kN) of vertical pull
- Height: 7'

Order No. SAK436 Mfg. No. 51/7FT

MANHANDLER® **HOISTS/WINCHES**

- Compact, durable steel construction
- Smooth, controlled winding action
- Effortless lifting and lowering with 5:1 gear ratio
- · Anti-backlash crank handle braking system prevents freewheeling
- Digital indicating system which counts drum turns

by Honeywel

- in order to determine maintenance periodicity
- · Built-in mounting bracket • 65' x 3/16" galvanized steel cable
- 350 lbs. (1.6 kN) working capacity
- Order No. SAR489

Mfg. No. 8442-Z7/65FT

MILLER



SEALED SELF-RETRACTING LIFELINE W/RETRIEVAL WINCH

- · Patented concept that separates all dynamic components from foreign elements such as grease, moisture and dirt
- Self contained bi-directional retrieval winch suitable for raising and lowering personnel in emergency rescue/retrieval situations
- Overload device reduces the possibility of injury
- should the worker become entangled during retrieval Input crank handle brake will prevent movement
- of the load if the handle is accidentally released Self adjusting disk brake will stop a fall and
- limit the arresting forces to 900 lbs. or less Quick-mount bracket that enables the user to attach it to a DBI/SALA support structure (tripod, davit arm, etc.) with ease
- Swiveling anchorage loop to
- prevent twisting of lifeline
- Self-locking swivel snap hook with impact indicator · Reserve lifeline retention system for added safety
- 50' x 3/16" galvanized steel wire rope
- Stainless steel and cast aluminum housing for corrosion resistance

Order No.	Mfg. No.	Description
SEB336	3400115C	50' Sealed SRL
SEH133	8301000	50' Searled SRL w/7' Tripod
-		· · · · ·

ADVANCED DIGITAL SERIES WINCHES

- Performs both descent and retrieval functions
- Removable aluminum crank handle
- Utilizes both 9:1 and 4:1 drives
- · Capable of average speeds from 4 m/min (13 ft/min) up to 9 m/min (30 ft/min)
- · Manually operated by simply rotating the handle to raise or lower
- personnel or materials Features a self-locking swivel snap hook
- 60' x 1/4" galvanized cable
- Order No. SEJ417

Mfg. No. 8518560

CONFINED SPACE RESCUE KITS

- Ready-to-use combination of North equipment for rescue, entry/egress
- 7' portable tripod with safety chain around legs
- 3-way self-retracting lifeline with cast aluminum housing -
- 50' stainless steel cable 3/16"
- Capacity: 310 lbs. (140 kg) Device mounting bracket
- Nylon storage bag
- Order No. SN130

Mfg. No. FP66/415SR

NORT

by Honeywell

SAR489

Order Mfg. No. No. **SN130**

Description

Winch sold

separately

FP664155R Tripod kit w/carrying bag and winch mounting bracket SAO558 FP2/7155R **Retrieval Winch**








SQUIDS® TOOL LANYARDS

- Nylon tubular elastic material stretched to allow flexibility
- in use and to help absorb the impact of a dropped tool
- Lightweight aluminum carabiner guickly attaches to a wide range of locations
- Reflective stitching runs the length of •
- the product for added visibility
- All lanyards have a maximum working capacity of 10 lbs., sewn directly on to the product



Order	Mfg.			Anchorage	Tool
No.	No.	Colour	Length'	Connection	Connection
SEE100	19008	Lime	28-35	Locking Carabiner	Adjustable Barrel Lock
TEP213	19002	Black	35-42	Carabiner	Adjustable Barrel Lock
SEE102	19003	Lime	35-42	Carabiner	Adjustable Barrel Lock
SEE103	19022	Black	35-42	Carabiner	Carabiner
SEE104	19023	Lime	35-42	Carabiner	Carabiner
SEJ654	19009	Lime	35-42	Triple Locking Carabiner	Adjustable Barrel Lock
SEJ655	19007	Lime	35-42	Screw-Lock Carabiner	Adjustable Barrel Lock

ARSENAL PLASTIC BOTTOM CANVAS TOOL BUCKETS

- High wall, heavy-duty construction
- Molded plastic base and top ring
- Interior pocket
- Size: 12.5" dia. x 15" H •
- Maximum safe working capacity: 150 lbs. · Available with safety tops to prevent tools and equipment from falling when hoisting them to an at-heights job site



Order No.	Mfg. No.	Description
SEE107	14433	Bucket w/Rope Handle
SEE108	14443	Bucket w/Rope Handle and Swivel Snap Hook
SEE109	14438	Safety Top for 12.5" dia.

ARSENAL LEATHER BOTTOM CANVAS TOOL BUCKETS

- High wall, heavy-duty construction
- with leather reinforced base
- Molded plastic top ring
- Interior pocket • Size: 12.5" dia. x 17" H
- Maximum safe working capacity: 150 lbs. · Available with safety tops to prevent tools and equipment from falling when hoisting them to an at-heights job site



SEE106

Order	Mfg.	
No.	No.	Description
SEE105	14430	Bucket w/Rope Handle
SEE106	14440	Bucket w/Rope Handle and Swivel Snap Hook
SEE109	14438	Safety Top for 12.5" dia.

HARD HAT LANYARDS

- Easily secures hard hat to the worker to prevent the hat from falling, causing a hazard and lost-time
- · Comfortably attaches to hard
- hats and other headwear
- High stretch elastic material

SEE108

• Available with double lock plastic buckle or easy-release clamp



Order No.	Mfg. No.	Description	
SED573	19150	Buckle	
SED574	19155	Clamp	

